


CH628 - PHOTOMETRY 6" COMMERCIAL DOWNLIGHT

CH628UE-D10 - 2200lm - 4000K

System Power	:31.3W	Multipliers	
Test Date	:12/2015	3500K	0.99
Beam Angle 50%	:77.9°	3000K	0.97
Field Angle 10%	:123.9°		
Color Temperature	:4000K		
CRI	:84		
R9 Value	:68		
Lumens Delivered	:2385.5lm		
CBCP	:1460cd		
Power Factor	:> 0.90		

CANDELA TABULATION

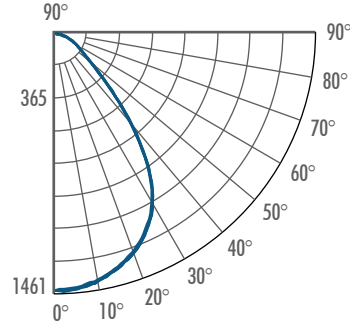

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8'	12.9'	22.8
10'	16.2'	14.6
12'	19.4'	10.1
14'	22.6'	7.4
16'	25.9'	5.7

CONTROLLED DIMMING (%)

Fixture	Dimming %
CH628-D10	15.00 %