


DL340 - PHOTOMETRY 4" ROUND CEILING DOWNLIGHT

DL340BUE-DUN - 850Lm - 4,000K

CANDELA TABULATION

FOOTCANDLE DISTRIBUTION

System Power	: 11.2W	Multipliers	
Test Date	: 9/2016	3,500K	0.99
Beam Angle 50%	: 56.2°	3,000K	0.97
Field Angle 10%	: 78.6°	2,700K	0.95
Color Temperature	: 3,876K		
CRI	: 84.3		
R9 Value	: 21.9		
Lumens Delivered	: 742Lm		
CBCP	: 893cd		
Power Factor	: 0.96		

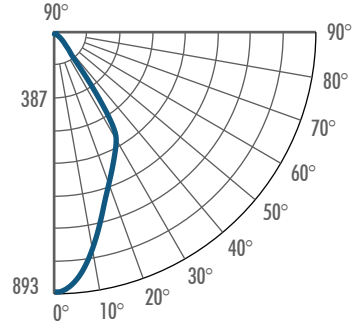

Height	Beam Diameter	FC
6.0'	6.4'	24.8
8.0'	8.5'	14.0
10.0'	10.7'	8.9
12.0'	12.8'	6.2
14.0'	15.0'	4.6


DL360 - PHOTOMETRY

6" ROUND CEILING DOWNLIGHT

DL360WUE-DUN - 1,200Lm - 4,000K

System Power	:15.1W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:92.6°	3,000K	0.97
Field Angle 10%	:111.1°	2,700K	0.95
Color Temperature	:3,903K		
CRI	:84.0		
R9 Value	:21.0		
Lumens Delivered	:1,113Lm		
CBCP	:636cd		
Power Factor	:0.99		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
6.0'	12.6'	17.7
8.0'	16.7'	9.9
10.0'	20.9'	6.4
12.0'	25.1'	4.4
14.0'	29.3'	3.2


DLQ340 - PHOTOMETRY

4" SQUARE CEILING DOWNLIGHT

DLQ340BUE-DUN - 850Lm - 4,000K

System Power	: 15.2W	Multipliers	
Test Date	: 9/2016	3,500K	0.99
Beam Angle 50%	: 64.3°	3,000K	0.97
Field Angle 10%	: 87.3°	2,700K	0.95
Color Temperature	: 3,937K		
CRI	: 84.6		
R9 Value	: 22.6		
Lumens Delivered	: 763Lm		
CBCP	: 709cd		
Power Factor	: 0.99		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
6.0'	7.5'	19.7
8.0'	10.1'	11.1
10.0'	12.6'	7.1
12.0'	15.1'	4.9
14.0'	17.6'	3.6


DLQ360 - PHOTOMETRY

6" SQUARE CEILING DOWNLIGHT

DLQ360WUE-DUN - 1,200Lm - 4,000K

System Power	:15.1W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:92.6°	3,000K	0.97
Field Angle 10%	:111.1°	2,700K	0.95
Color Temperature	:3,903K		
CRI	:84.0		
R9 Value	:21.0		
Lumens Delivered	:1,113Lm		
CBCP	:636cd		
Power Factor	:0.99		

CANDELA TABULATION

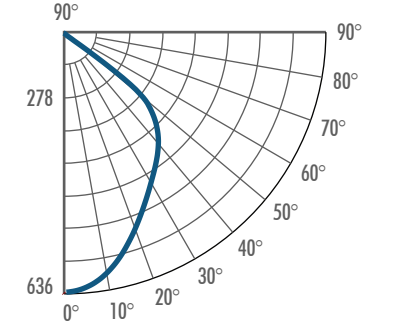

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
6.0'	12.6'	17.7
8.0'	16.7'	9.9
10.0'	20.9'	6.4
12.0'	25.1'	4.4
14.0'	29.3'	3.2