


LCMPD12QW-T30, (2100lm / 22W, 3000K, CRI: 80)


System Power	22.5W	MULTIPLIERS	
Test Date	1/12/2016	4000K	1.09
Beam Angle (50%)	110.5°	3500K	1.05
Field Angle (10%)	160.5°	3000K	1.00
Color Temperature	3000K		
CRI:	80		
Lumens Delivered	1904.4lm		
CBCP	679cd		
Power Factor:	>.90cd		

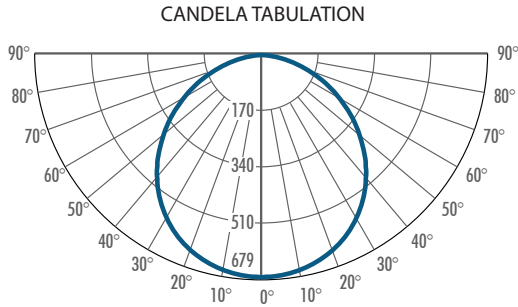

HT (Ft)	Beam Diameter	FC
6.0'	17.3'	18.9
8.0'	23.1'	10.6
10.0'	28.8'	6.8
12.0'	34.6'	4.7
14.0'	40.4'	3.5

LCMPD12QW-T40, (2100lm / 22W, 4000K, CRI: 80)

System Power	22.3W	MULTIPLIERS	
Test Date	1/12/2016	4000K	1.00
Beam Angle (50%)	110.5°	3500K	0.96
Field Angle (10%)	160.7°	3000K	0.91
Color Temperature	4000K		
CRI:	80		
Lumens Delivered	2084.4lm		
CBCP	742 cd		
Power Factor:	>.90 cd		

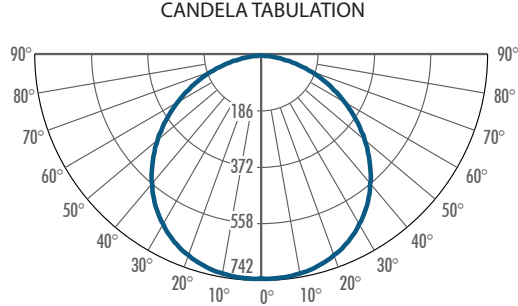

HT (Ft)	Beam Diameter	FC
8.0'	23.1'	11.6
10.0'	28.8'	7.4
12.0'	34.6'	5.2
14.0'	40.4'	3.8
16.0'	46.1'	2.9