


LRALD6SSF350-B15-T40 - SPOT - 4,000K

System Power	:43.8W	Multipliers	
Test Date	:11/2016	3500K	0.99
Beam Angle 50%	:17.7°	3000K	0.97
Field Angle 10%	:40.4°	2700K	0.95
Color Temperature	:4080K	2500K	0.45
CRI	:84.2	1700K	0.42
R9 Value	:24.2	CRI	
Lumens Delivered	:4628lm	80CRI (Blank)	:1.00
CBCP	:26955cd	90CRI (-C90)	:0.71
Power Factor	:0.99	97CRI (-C97)	:0.73

CANDELA TABULATION

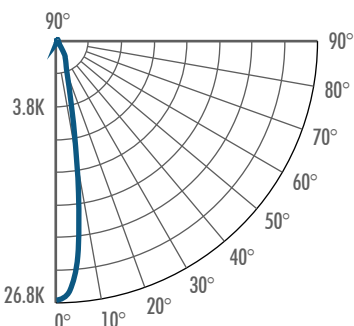


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
3.3'	1.0'	2492.4
6.6'	2.0'	623.1
9.8'	3.1'	276.9
13.1'	4.1'	155.8
16.4'	5.1'	99.7

LRALD6SSF350-B25-T40 - NARROW FLOOD - 4,000K

System Power	:43.8W	Multipliers	
Test Date	:11/2016	3500K	0.99
Beam Angle 50%	:25.1°	3000K	0.97
Field Angle 10%	:54.4°	2700K	0.95
Color Temperature	:4086K	2500K	0.45
CRI	:83.9	1700K	0.42
R9 Value	:22.3	CRI	
Lumens Delivered	:4516lm	80CRI (Blank)	:1.00
CBCP	:16368cd	90CRI (-C90)	:0.71
Power Factor	:0.99	97CRI (-C97)	:0.73

CANDELA TABULATION

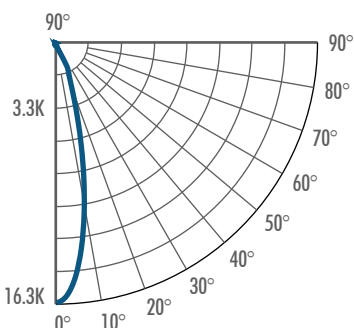


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
3.3'	1.5'	1518.9
6.6'	2.9'	379.7
9.8'	4.4'	168.8
13.1'	5.9'	94.9
16.4'	7.3'	60.8

LRALD6SSF350-B60-T40 - WIDE FLOOD - 4000K

System Power	:44.3W	Multipliers	
Test Date	:11/2016	3500K	0.99
Beam Angle 50%	:60.2°	3000K	0.97
Field Angle 10%	:97.2°	2700K	0.95
Color Temperature	:3982K	2500K	0.45
CRI	:83.5	1700K	0.42
R9 Value	:20.2	CRI	
Lumens Delivered	:3519lm	80CRI (Blank)	:1.00
CBCP	:3210cd	90CRI (-C90)	:0.71
Power Factor	:0.99	97CRI (-C97)	:0.73

CANDELA TABULATION

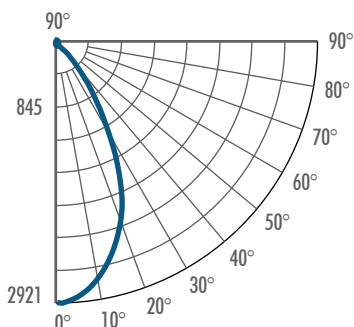

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
3.3'	3.8'	297.8
6.6'	7.6'	74.4
9.8'	11.4'	33.1
13.1'	15.2'	18.6
16.4'	19.0'	11.9

RECOMMENDED SPACING

20 FEET

Layout	FC	Max/Min	W/sf2
10 x 10	29	1.19	0.41
8 x 8	47	1.23	0.641

24 FEET

Layout	FC	Max/Min	W/sf2
12 x 12	21	1.14	0.308
8 x 8	44	1.38	0.641

30 FEET

Layout	FC	Max/Min	W/sf2
12 x 12	20	1.29	0.308
8 x 8	41	1.6	0.641