


## LRLD1321 - PHOTOMETRY

### 3" Micro-Cast Reflector (700lm)

#### LRLD1321 - 3000K

|                   |         |
|-------------------|---------|
| System Power      | :8.8W   |
| Test Date         | :3/2016 |
| Beam Angle 50%    | :36.2°  |
| Field Angle 10%   | :65.3°  |
| Color Temperature | :3000K  |
| CRI               | :90.0   |
| R9 Value          | :73.0   |
| Lumens Delivered  | :680Lm  |
| CBCP              | :1494cd |
| Power Factor      | :0.89   |

#### CANDELA TABULATION

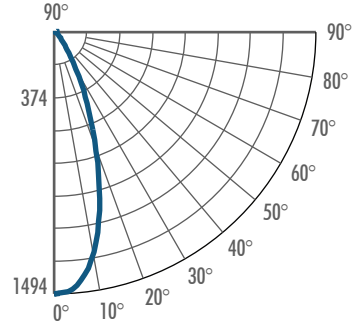

#### FOOTCANDLE DISTRIBUTION

| Height | Beam Diameter | FC   |
|--------|---------------|------|
| 8.0'   | 5.2'          | 23.3 |
| 10.0'  | 6.5'          | 14.9 |
| 12.0'  | 7.8'          | 10.4 |
| 16.0'  | 10.5'         | 5.8  |
| 20.0'  | 13.1'         | 3.7  |