


LRLDQ288 - PHOTOMETRY

Adjustable Square Gimbal (700Lm)

APPLICATION DATA:

H = Height (Ceiling to ground or wall)
W = Beam Width
L = Beam Length
D = Distance
FC = Foot Candles

*Fixture calculated at aiming point (90°)
to horizontal surface.

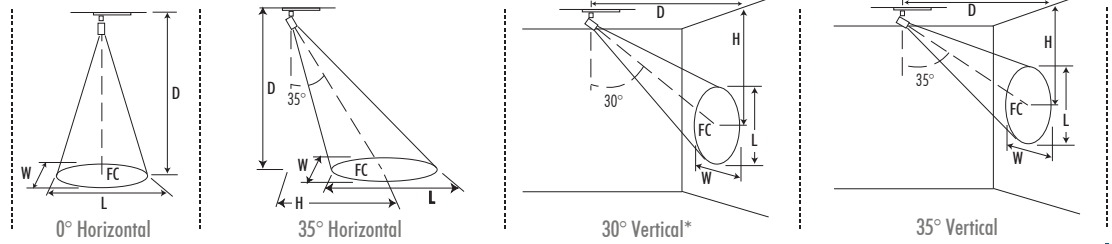

LRLDQ288 - 3,000K

System Power	:8.8W
Test Date	:10/2016
Beam Angle 50%	:39.2°
Field Angle 10%	:75.6°
Color Temperature	:3,000K
CRI	:90.0
R9 Value	:73.0
Lumens Delivered	:696Lm
CBCP	:1,199cd
Power Factor	:0.89

H	FC	W/L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L
8.0'	19	5.7'	8.0'	3.7'	14	5.7'	7.1'	3.0'	5.2'	17	2.1'	13.8'	3.0'	4.3'	25	2.1'	8.8'
12.0'	8	8.5'	12.0'	5.6'	6	8.5'	10.7'	4.0'	6.9'	9	2.8'	18.4'	4.0'	5.7'	14	2.8'	11.7'
16.0'	5	11.4'	16.0'	7.5'	3	11.4'	14.3'	5.0'	8.7'	6	3.6'	23.0'	5.0'	7.1'	9	3.6'	14.6'
20.0'	3	14.2'	20.0'	9.3'	2	14.2'	17.8'	6.0'	10.4'	4	4.3'	27.6'	6.0'	8.6'	6	4.3'	17.5'

CANDELA TABULATION

