


PROJECT INFORMATION

Type :

Project :

Catalog # :

LT770

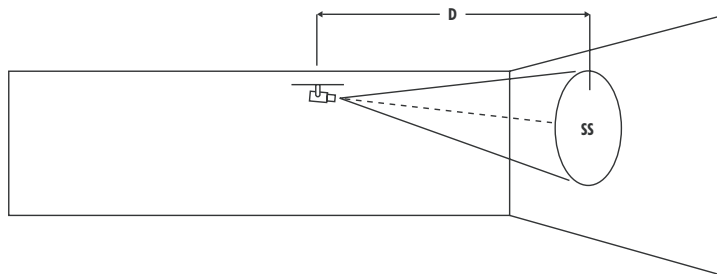

D : Distance to the horizontal or vertical surface.
SS : Spot size at the center of the beam where candle power is reduced to 50%.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance.

MR16 50W 12V



"Measuring the Spot Size"

D: Spot at 3 Feet Spot at 4 Feet Spot at 5 Feet Spot at 6 Feet Spot at 7 Feet Spot at 8 Feet Spot at 9 Feet Spot at 10 Feet

ACCESSORIES

Spot Diameter from 3 ft. all the way to 10 ft. (SS)

No Accessories

24" Diameter 28" Diameter 38" Diameter 47" Diameter 54" Diameter 64" Diameter 74" Diameter 78" Diameter

Biggest Hole Blade
20mm Diameter

18" Diameter 24" Diameter 34" Diameter 42" Diameter 50" Diameter 58" Diameter 64" Diameter 70" Diameter

2nd Biggest Hole Blade
15mm Diameter

16" Diameter 22" Diameter 31" Diameter 39" Diameter 46" Diameter 52" Diameter 56" Diameter 62" Diameter

2nd Small Hole Blade
10mm Diameter

14" Diameter 17" Diameter 22" Diameter 26" Diameter 31" Diameter 36" Diameter 41" Diameter 44" Diameter

Smallest Hole Blade
5mm Diameter

11" Diameter 13" Diameter 16" Diameter 20" Diameter 23" Diameter 27" Diameter 30" Diameter 33" Diameter