


APPLICATION DATA:

H = Height (Ceiling to ground or wall)
W = Beam Width
L = Beam Length
D = Distance
FC = Foot Candles

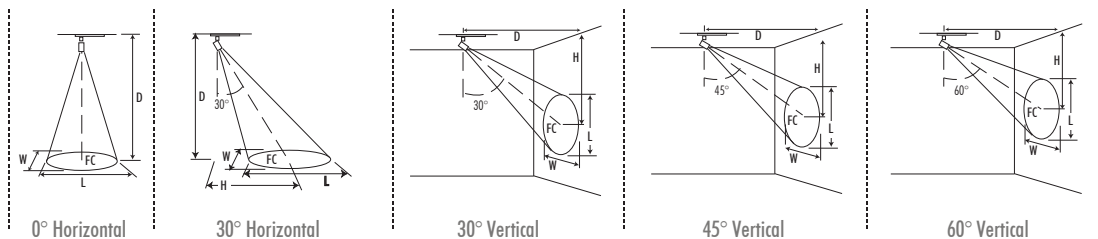


LTD7410-B15-T40 - Spot - 4000K

System Power	:15.4W
Test Date	:3/2017
Beam Angle 50%	:25.4°
Field Angle 10%	:59.5°
Color Temperature	:4122K
CRI	:92.9
R9 Value	:72.5
Lumens Delivered	:964lm
CBCP	:3063cd
Power Factor	:1.00

H	FC	W/L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L
4.0'	265	1.8'	4.0'	2.0'	170	1.8'	2.1'	2.0'	3.5'	125	1.6'	3.7'	2.0'	2.0'	353	1.1'	1.7'	4.0'	2.3'	138	2.0'	2.3'
5.0'	158	2.3'	5.0'	2.5'	102	2.3'	2.7'	3.0'	5.2'	51	2.5'	5.9'	3.0'	3.0'	144	1.7'	2.6'	5.0'	2.9'	87	2.5'	2.9'
6.0'	105	2.7'	6.0'	3.1'	68	2.8'	3.3'	4.0'	6.9'	27	3.4'	8.0'	4.0'	4.0'	77	2.4'	3.6'	6.0'	3.5'	59	3.0'	3.5'
7.0'	75	3.2'	7.0'	3.7'	48	3.3'	3.9'	5.0'	8.7'	17	4.3'	10.1'	5.0'	5.0'	48	3.0'	4.5'	7.0'	4.0'	43	3.5'	4.1'
8.0'	56	3.6'	8.0'	4.6'	31	4.2'	4.9'	6.0'	10.4'	12	5.2'	12.2'	6.0'	6.0'	33	3.7'	5.4'	8.0'	4.6'	33	4.1'	4.8'

CANDELA TABULATION




LTD7410-B25-T40 - Narrow Flood

System Power	:15.4W
Test Date	:3/2016
Beam Angle 50%	:32.2°
Field Angle 10%	:62.4°
Color Temperature	:4124K
CRI	:93.0
R9 Value	:72.4
Lumens Delivered	:912lm
CBCP	:2364cd
Power Factor	:1.00

H	FC	W/L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L
4.0'	204	2.3'	4.0'	2.0'	132	2.3'	2.7'	2.0'	3.5'	96	2.0'	5.4'	2.0'	2.0'	272	1.4'	2.2'	4.0'	2.3'	88	3.1'	3.7'
5.0'	122	2.9'	5.0'	2.5'	79	2.9'	3.5'	3.0'	5.2'	39	3.2'	8.5'	3.0'	3.0'	111	2.2'	3.5'	5.0'	2.9'	55	3.9'	4.6'
6.0'	81	3.5'	6.0'	3.1'	52	3.6'	4.3'	4.0'	6.9'	21	4.3'	11.5'	4.0'	4.0'	60	3.1'	4.7'	6.0'	3.5'	38	4.7'	5.6'
7.0'	58	4.0'	7.0'	3.7'	37	4.3'	5.1'	5.0'	8.7'	13	5.5'	14.6'	5.0'	5.0'	37	3.9'	6.0'	7.0'	4.0'	28	5.5'	6.6'
8.0'	43	4.6'	8.0'	4.6'	24	5.3'	6.3'	6.0'	10.4'	9	6.6'	17.7'	6.0'	6.0'	25	4.7'	7.2'	8.0'	4.6'	21	6.3'	7.5'

CANDELA TABULATION



LTD7410-B45-T40 - Flood - 4000K

System Power	:15.4W
Test Date	:3/2017
Beam Angle 50%	:38.4°
Field Angle 10%	:65.8°
Color Temperature	:4126K
CRI	:92.8
R9 Value	:72.2
Lumens Delivered	:940lm
CBCP	:1955cd
Power Factor	:1.00

H	FC	W/L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L	D	H	FC	W	L
4.0'	216	2.9'	4.0'	2.0'	139	2.9'	3.5'	2.0'	3.5'	79	2.4'	7.7'	2.0'	2.0'	225	1.7'	2.8'	4.0'	2.3'	88	3.1'	3.7'
5.0'	129	3.7'	5.0'	2.5'	83	3.7'	4.5'	3.0'	5.2'	32	3.8'	12.0'	3.0'	3.0'	92	2.7'	4.4'	5.0'	2.9'	55	3.9'	4.6'
6.0'	86	4.4'	6.0'	3.1'	55	4.6'	5.5'	4.0'	6.9'	17	5.2'	16.4'	4.0'	4.0'	49	3.7'	5.9'	6.0'	3.5'	38	4.7'	5.6'
7.0'	61	5.1'	7.0'	3.7'	39	5.4'	6.6'	5.0'	8.7'	11	6.6'	20.8'	5.0'	5.0'	31	4.7'	7.5'	7.0'	4.0'	28	5.5'	6.6'
8.0'	46	5.9'	8.0'	4.6'	25	6.8'	8.2'	6.0'	10.4'	7	8.0'	25.2'	6.0'	6.0'	21	5.7'	9.1'	8.0'	4.6'	21	6.3'	7.5'

CANDELA TABULATION

