


PROJECT INFORMATION

Type :

Project :

Catalog # :

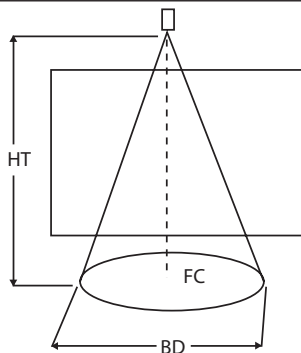

HT : Distance to the horizontal or vertical surface.

FC : Initial foot candles at the center of the beam.

BD : Diameter of the beam where candle power is reduced to 50% of center beam candle power.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance. Distance, length, and width given in decimal feet.

ConstantColor® CMH® HID GX10 MR16 - 20 Watts (12°)

HT (Ft)	Beam Dia.	Foot Candle
3.0'	0.6'	1000 FC
6.0'	1.3'	250 FC
9.0'	1.9'	111 FC
12.0'	2.5'	62 FC

ConstantColor® CMH® HID GX10 MR16 - 39 Watts (12°)

HT (Ft)	Beam Dia.	Foot Candle
3.0'	0.6'	1778 FC
6.0'	1.3'	444 FC
9.0'	1.9'	198 FC
12.0'	2.5'	111 FC

ConstantColor® CMH® HID GX10 MR16 - 20 Watts (25°)

HT (Ft)	Beam Dia.	Foot Candle
3.0'	1.3'	322 FC
6.0'	2.7'	81 FC
9.0'	4.0'	36 FC
12.0'	5.3'	20 FC

ConstantColor® CMH® HID GX10 MR16 - 39 Watts (25°)

HT (Ft)	Beam Dia.	Foot Candle
3.0'	1.3'	611 FC
6.0'	2.7'	153 FC
9.0'	4.0'	68 FC
12.0'	5.3'	38 FC

ConstantColor® CMH® HID GX10 MR16 - 20 Watts (40°)

HT (Ft)	Beam Dia.	Foot Candle
3.0'	2.2'	167 FC
6.0'	4.4'	42 FC
9.0'	6.6'	19 FC
12.0'	8.7'	10 FC

ConstantColor® CMH® HID GX10 MR16 - 39 Watts (40°)

HT (Ft)	Beam Dia.	Foot Candle
3.0'	2.2'	333 FC
6.0'	4.4'	83 FC
9.0'	6.6'	37 FC
12.0'	8.7'	21 FC