

WD1340 - PHOTOMETRY


4" Round 1-Direction Wall Mount

WD1340BUE-DUN - 1,000Lm - 4,000K

CANDELA TABULATION

FOOTCANDLE DISTRIBUTION

System Power	:15.4W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:60.7°	3,000K	0.97
Field Angle 10%	:81.3°	2,700K	0.95
Color Temperature	:3,983K		
CRI	:83.5		
R9 Value	:18.1		
Lumens Delivered	:954Lm		
CBCP	:1,076cd		
Power Factor	:0.99		

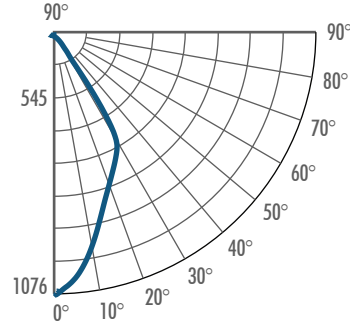

Height	Beam Diameter	FC
6.0'	7.0'	29.9
8.0'	9.4'	16.8
10.0'	11.7'	10.8
12.0'	14.1'	7.5
14.0'	16.4'	5.5

WD1360 - PHOTOMETRY


6" Round 1-Direction Wall Mount

WD1360WUE-DUN - 1,250Lm - 4,000K

CANDELA TABULATION

FOOTCANDLE DISTRIBUTION

System Power	:15.0W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:70.4°	3,000K	0.97
Field Angle 10%	:100.2°	2,700K	0.95
Color Temperature	:3,930K		
	:83.8		
R9 Value	:21.0		
Lumens Delivered	:1,069Lm		
CBCP	:813cd		
Power Factor	:0.99		

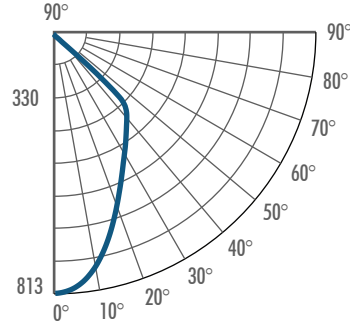

Height	Beam Diameter	FC
8.0'	11.3'	12.7
10.0'	14.1'	8.1
12.0'	16.9'	5.6
14.0'	19.8'	4.1
16.0'	22.6'	3.2


WD1362 - PHOTOMETRY

6" Round 1-Direction Wall Mount

WD1362WUE-DUN - 1,200Lm - 4,000K

System Power	:22.0W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:70.1°	3,000K	0.97
Field Angle 10%	:101.0°	2,700K	0.95
Color Temperature	:3,906K		
CRI	:84.9		
R9 Value	:22.0		
Lumens Delivered	:1,660Lm		
CBCP	:1,228cd		
Power Factor	:0.99		

CANDELA TABULATION

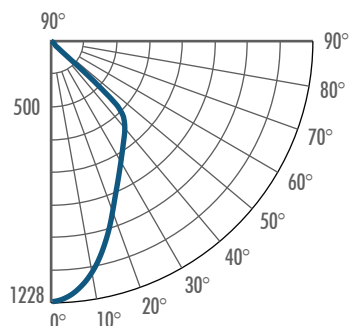


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	11.2'	19.2
10.0'	14.0'	12.3
12.0'	16.8'	8.5
14.0'	19.6'	6.3
16.0'	22.4'	4.8

WD1362BUE-DUN-T30 - 1,200Lm - 3,000K

System Power	:22.0W	Multipliers	
Test Date	:9/2016	4,000K	1.04
Beam Angle 50%	:71.4°	3,500K	1.02
Field Angle 10%	:101.3°	2,700K	0.95
Color Temperature	:2,963K		
CRI	:83.4		
R9 Value	:15.0		
Lumens Delivered	:1,289Lm		
CBCP	:957cd		
Power Factor	:0.99		

CANDELA TABULATION

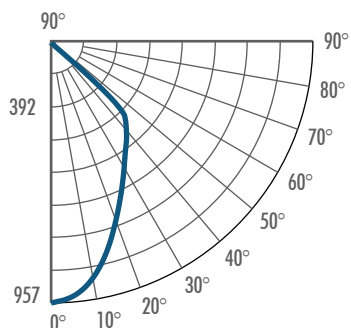

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	11.5'	15.0
10.0'	14.4'	9.6
12.0'	17.2'	6.6
14.0'	20.1'	4.9
16.0'	23.0'	3.7


WD1Q340 - PHOTOMETRY

4" Square 1-Direction Wall Mount

WD1Q340BUE-DUN - 850Lm - 4,000K

System Power	:15.2W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:64.3°	3,000K	0.97
Field Angle 10%	:87.3°	2,700K	0.95
Color Temperature	:3,937K		
CRI	:84.6		
R9 Value	:22.6		
Lumens Delivered	:763Lm		
CBCP	:709cd		
Power Factor	:0.99		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
6.0'	7.5'	19.7
8.0'	10.1'	11.1
10.0'	12.6'	7.1
12.0'	15.1'	4.9
14.0'	17.6'	3.6

WD1Q360 - PHOTOMETRY


6" Square 1-Direction Wall Mount

WD1Q360WUE-DUN - 1,000Lm - 4,000K

CANDELA TABULATION

FOOTCANDLE DISTRIBUTION

System Power	:15.0W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:70.4°	3,000K	0.97
Field Angle 10%	:100.2°	2,700K	0.95
Color Temperature	:3,930K		
CRI	:83.8		
R9 Value	:20.7		
Lumens Delivered	:1,069Lm		
CBCP	:812cd		
Power Factor	:0.99		



Height	Beam Diameter	FC
8.0'	11.3'	12.7
10.0'	14.1'	8.1
12.0'	16.9'	5.6
14.0'	19.8'	4.1
16.0'	22.6'	3.2


WD2340 - PHOTOMETRY

4" Round 2-Direction Wall Mount

WD2340BUE-DUN - 2 x 1,000Lm - 4,000K

System Power	:31.1W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:59.3°	3,000K	0.97
Field Angle 10%	:83.9°	2,700K	0.95
Color Temperature	:3,903K		
CRI	:83.8		
R9 Value	:20.0		
Lumens Delivered	:2,032Lm		
CBCP	:1,173cd		
Power Factor	:0.99		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
6.0'	6.8'	32.6
8.0'	9.1'	18.3
10.0'	11.4'	11.7
12.0'	13.7'	8.1
14.0'	15.9'	6.0


WD2360 - PHOTOMETRY

6" Round 2-Direction Wall Mount

WD2360BUE-DUN - 2 x 1,000Lm - 4,000K

System Power	:31.0W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:69.2°	3,000K	0.97
Field Angle 10%	:105.9°	2,700K	0.95
Color Temperature	:3,898K		
CRI	:83.8		
R9 Value	:20.0		
Lumens Delivered	:2,069Lm		
CBCP	:829cd		
Power Factor	:0.99		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	11.0'	13.0
10.0'	13.8'	8.3
12.0'	16.6'	5.8
14.0'	19.3'	4.2
16.0'	22.1'	3.2


WD2Q340 - PHOTOMETRY

4" Square 2-Direction Wall Mount

WD2Q340BUE-DUN - 2 x 850Lm - 4,000K

System Power	:31.1W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:63.4°	3,000K	0.97
Field Angle 10%	:92.1°	2,700K	0.95
Color Temperature	:3,957K		
CRI	:84.4		
R9 Value	:23.0		
Lumens Delivered	:1,607Lm		
CBCP	:753cd		
Power Factor	:0.99		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
6.0'	7.4'	20.9
8.0'	9.9'	11.8
10.0'	12.4'	7.5
12.0'	14.8'	5.2
14.0'	17.3'	3.8

WD2Q360 - PHOTOMETRY


6" SQUARE 2-DIRECTION WALL MOUNT

WD2Q360BUE-DUN - 2 x 1,000Lm - 4,000K

CANDELA TABULATION

FOOTCANDLE DISTRIBUTION

System Power	:31.0W	Multipliers	
Test Date	:9/2016	3,500K	0.99
Beam Angle 50%	:69.2°	3,000K	0.97
Field Angle 10%	:105.9°	2,700K	0.95
Color Temperature	:3,898K		
CRI	:83.8		
R9 Value	:20.0		
Lumens Delivered	:2,069Lm		
CBCP	:829cd		
Power Factor	:0.99		



Height	Beam Diameter	FC
8.0'	11.0'	13.0
10.0'	13.8'	8.3
12.0'	16.6'	5.8
14.0'	19.3'	4.2
16.0'	22.1'	3.2