



WLP31-25W-T40 - 25W/3250lm - 4000K

System Power	:25.0W	Lumen Multipliers
Test Date	:9/2016	7800lm 2.4
Beam Angle 50%	:57.2°	
Field Angle 10%	:68.8°	
Color Temperature	:4000K	
CRI	:80	
Lumens Delivered	:3309.4lm	
CBCP	:4012cd	
Power Factor	:0.99	


LUMINOUS INTENSITY DISTRIBUTION CURVE

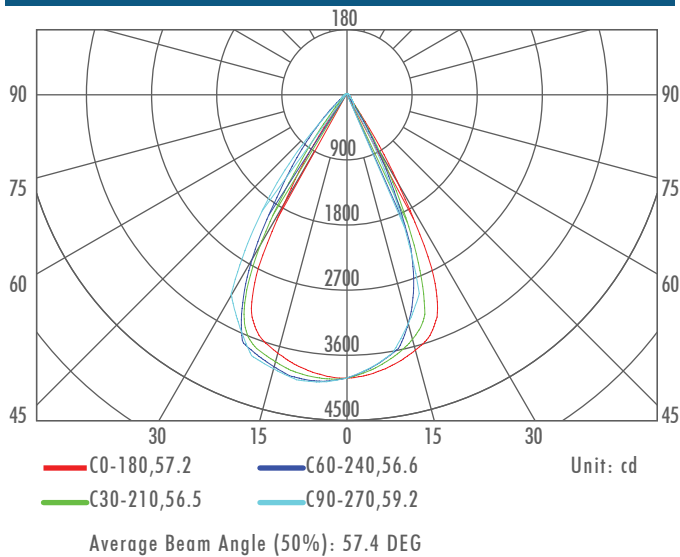


ILLUMINANCE AT A DISTANCE (BEAM ANGLE)

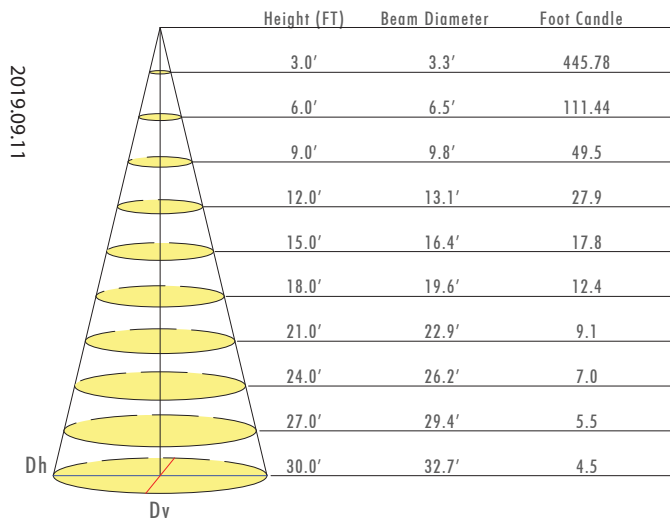

ISOCANDELA (RECTANGLE)

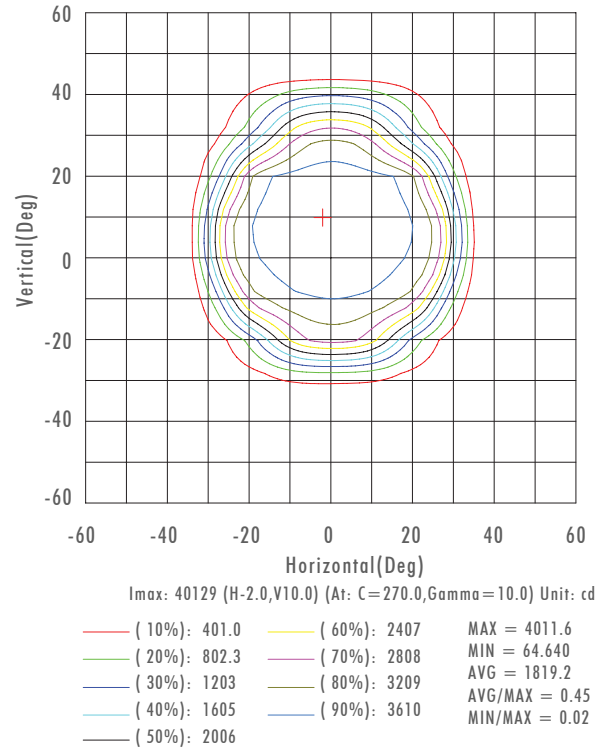

ISO FC PLOT

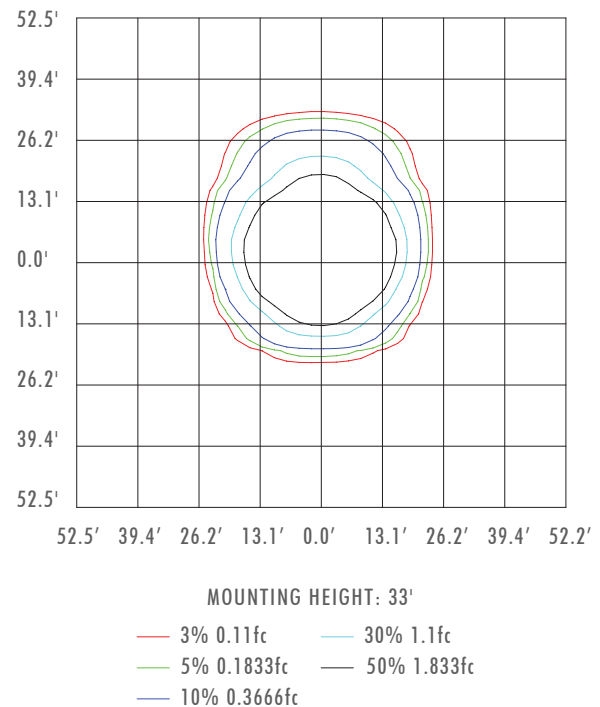


Fixture: WLP31-25W

Description: 9" DEXTERO ADJUSTABLE WALL FLOOD (3250LM)

LCS table		
BUG rating: B3 - UX - G0		
Forward light	Lumens	Lumens %
Low (0-30):	1474.6	44.50%
Medium (30-60):	535.5	16.20%
High (60-80):	27.7	0.80%
Very high (80-90):	1.5	0.00%
Back light	Lumens	Lumens %
Low (0-30):	1095.4	33.10%
Medium (30-60):	146.1	4.40%
High (60-80):	27.9	0.80%
Very high (80-90):	4.4	0.10%
Trapped light	0	0.00%

LCS graph

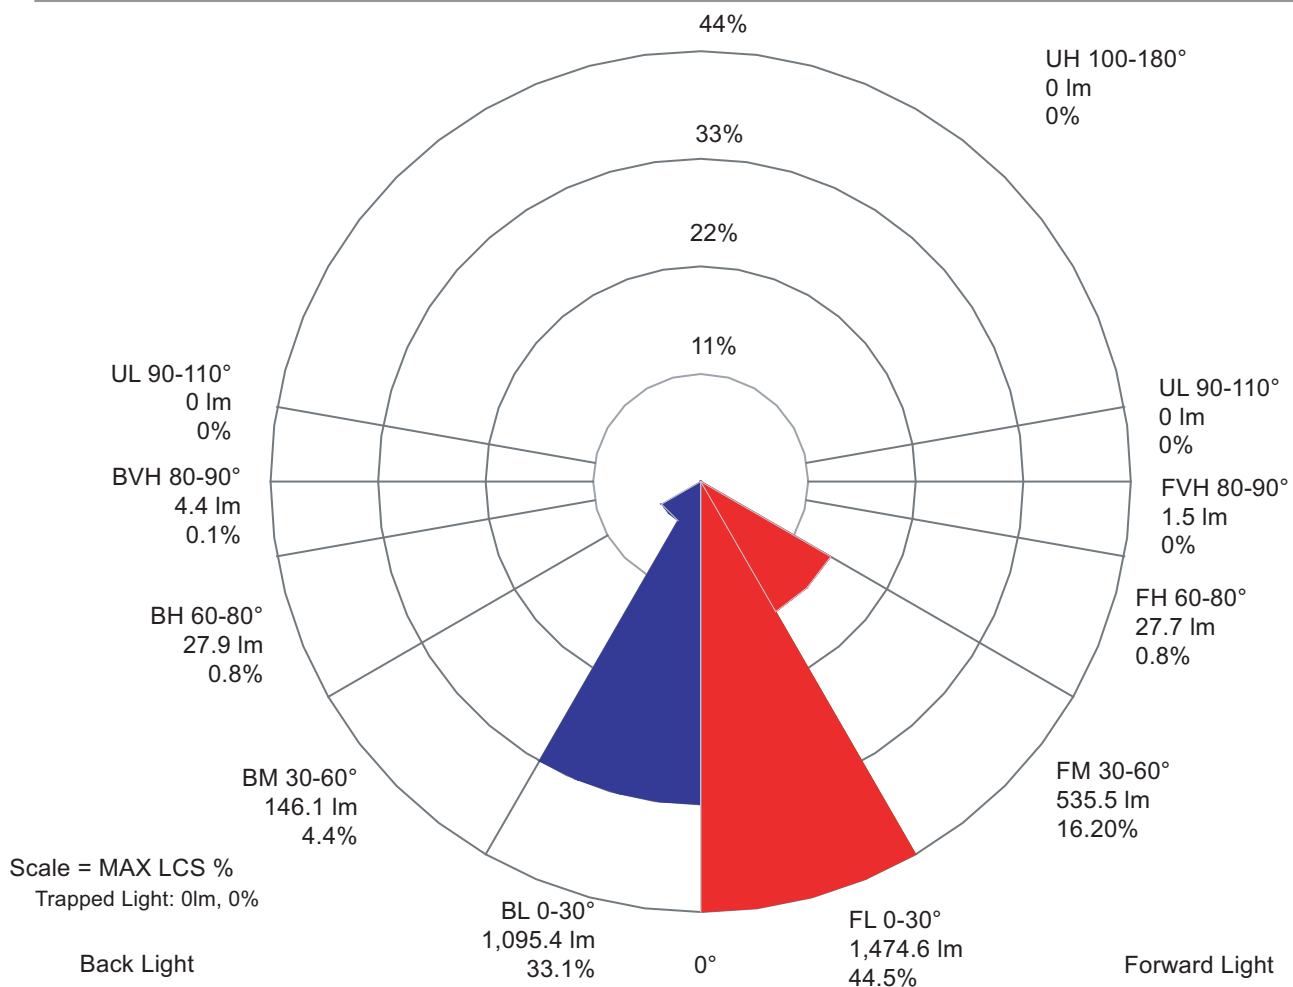


2019.09.10

Model No: WLP31-25WUE-D10-SH

Description: 9 INCH DEXTERO ADJUSTABLE WALL FLOOD (3250LM)

LCS table		
BUG rating:	B3 U1 G0	
Forward light	Lumens	Lumens %
Low(0-30):	863.8	32.4%
Medium(30-60):	212.1	8%
High(60-80):	16.2	0.6%
Very high(80-90):	8.7	0.3%
Back light		
Low(0-30):	1084.1	40.7%
Medium(30-60):	453.7	17%
High(60-80):	20.6	0.8%
Very high(80-90):	6.7	0.3%
Uplight		
Low(90-100):	0	0%
High(100-180):	0	0%


LCS graph

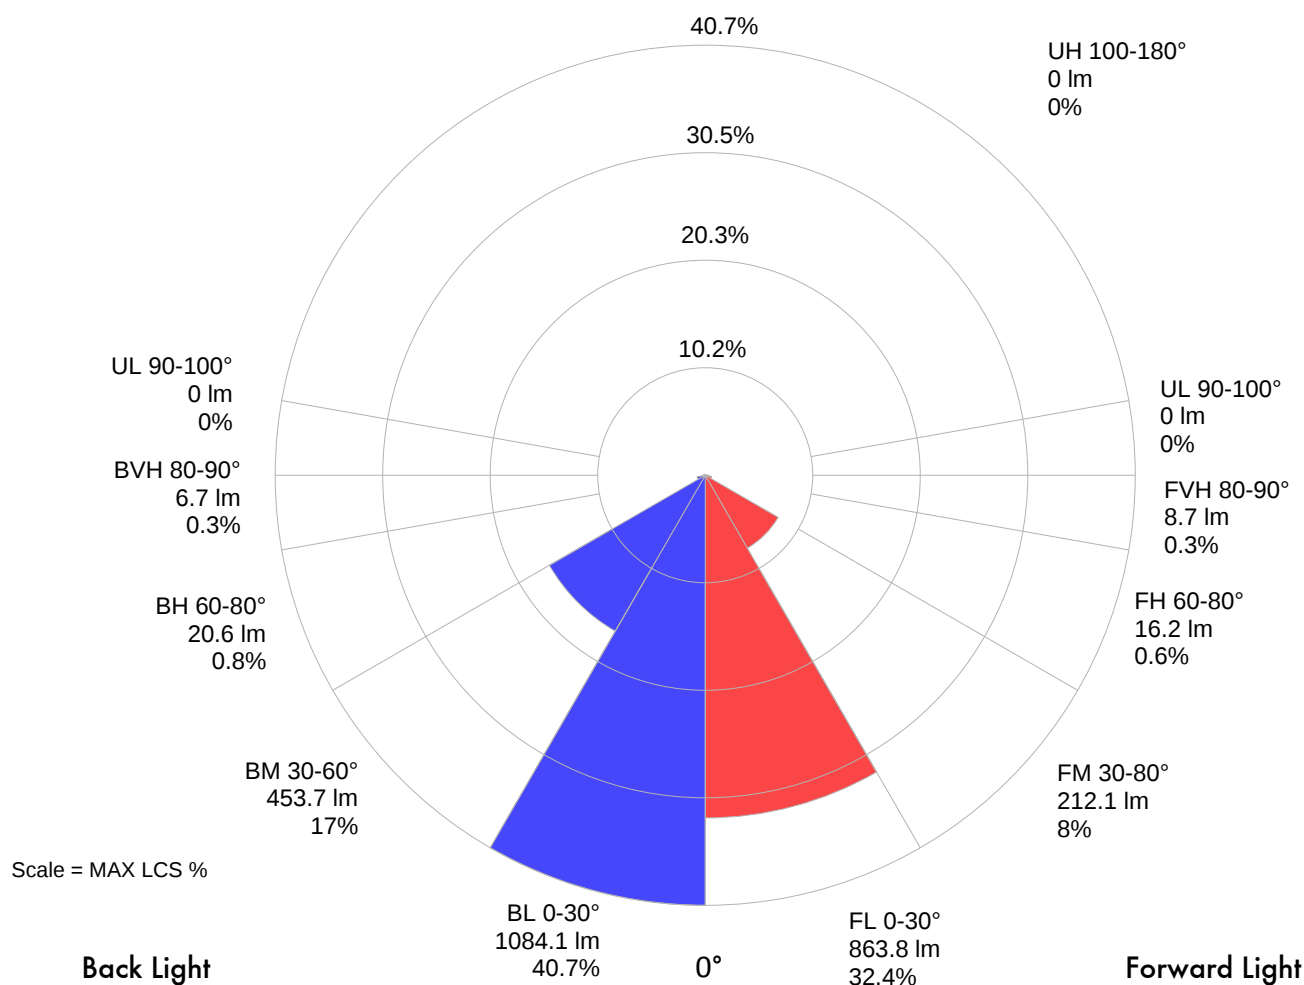


WLP31-40W-T40 - 40W/5200lm - 4000K

System Power	:41.3W	Lumen Multipliers
Test Date	:9/2016	7800lm 1.5
Beam Angle 50%	:59.0°	
Field Angle 10%	:69.9°	
Color Temperature	:4000K	
CRI	:80	
Lumens Delivered	:4948.3lm	
CBCP	:5678.62cd	
Power Factor	:0.99	


LUMINOUS INTENSITY DISTRIBUTION CURVE

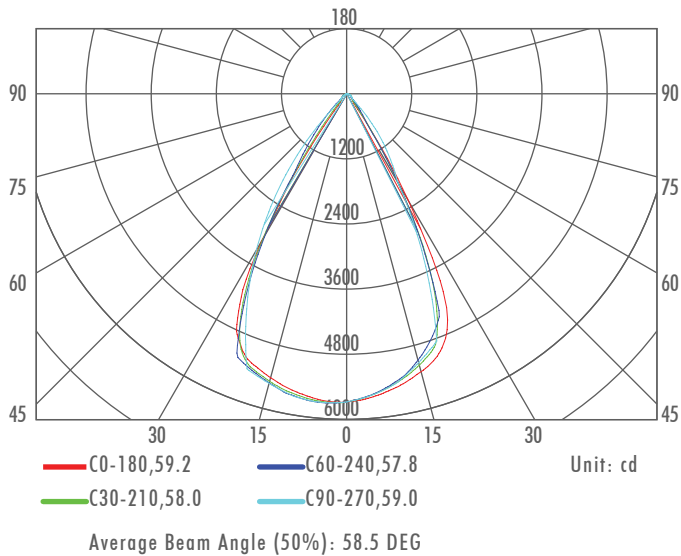


ILLUMINANCE AT A DISTANCE (BEAM ANGLE)

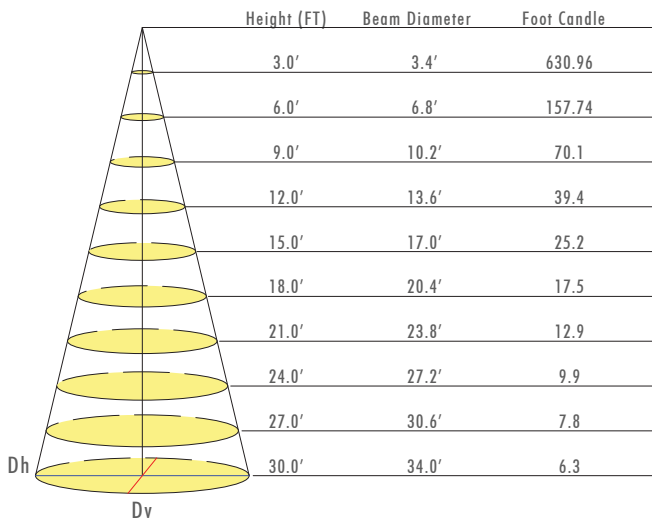

ISOCANDELA (RECTANGLE)

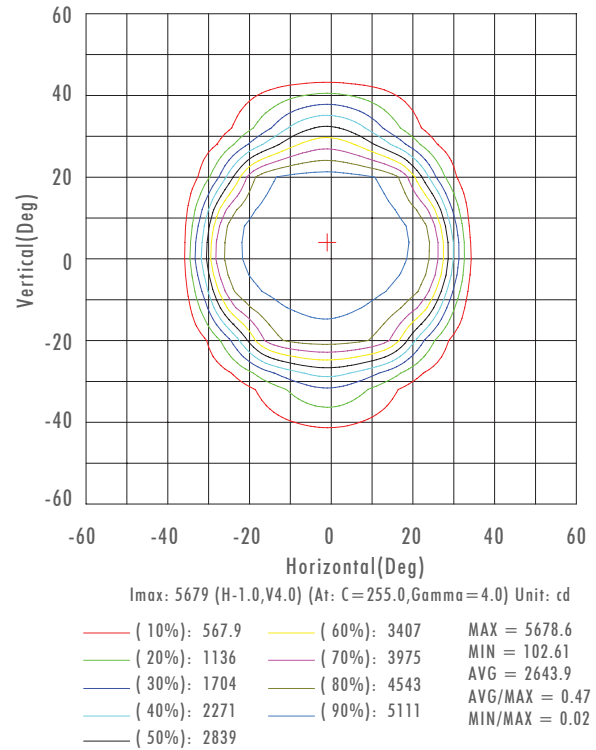

ISO FC PLOT

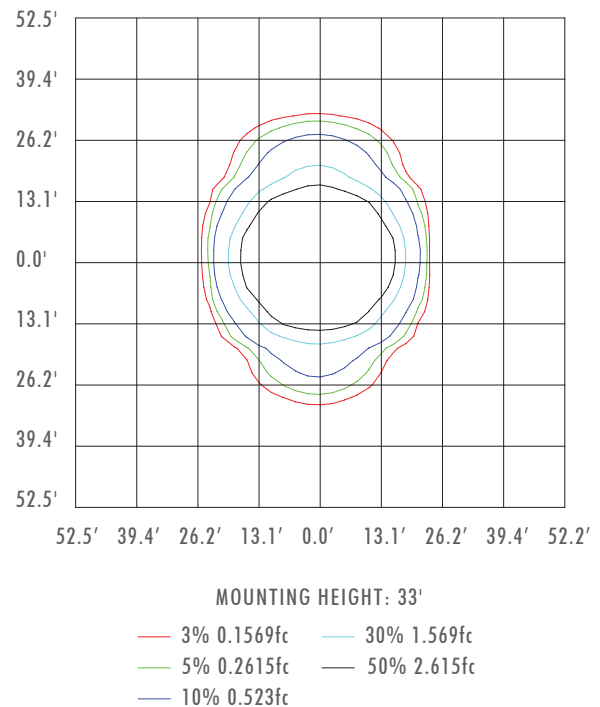


Fixture: WLP31-40W

Description: 9" DEXTERO ADJUSTABLE WALL FLOOD (5200LM)

LCS table		
BUG rating: B3 - UX - G0		
Forward light	Lumens	Lumens %
Low (0-30):	2023.2	40.90%
Medium (30-60):	604.4	12.20%
High (60-80):	42.7	0.90%
Very high (80-90):	2	0.00%
Back light	Lumens	Lumens %
Low (0-30):	1821	36.80%
Medium (30-60):	403.2	8.10%
High (60-80):	50.6	1.00%
Very high (80-90):	6.8	0.10%
Trapped light	0	0.00%

LCS graph

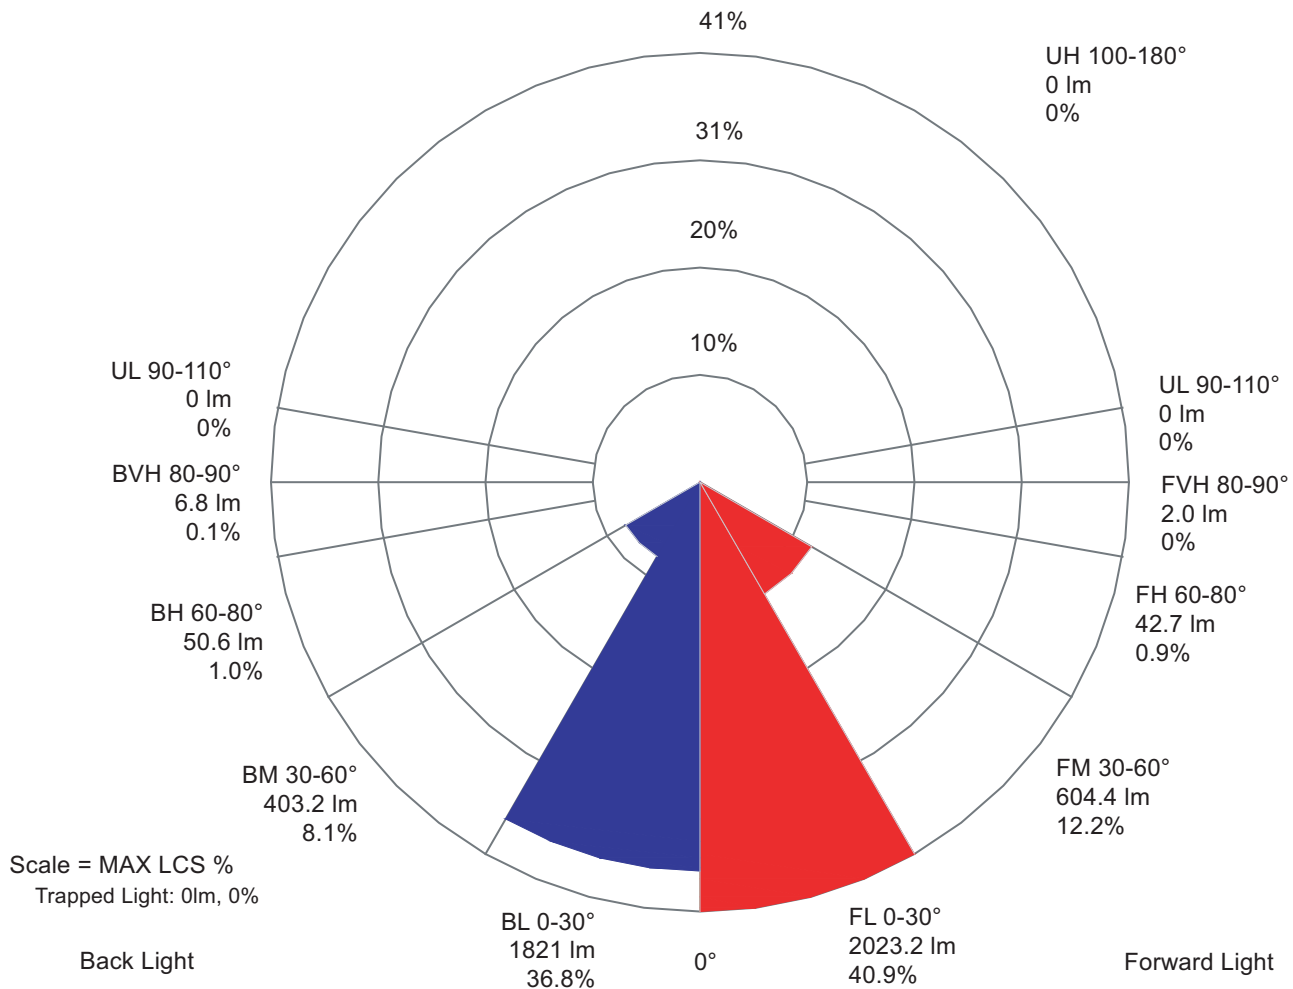


2019.09.10

Fixture: WLP31-60W

Description: 9" DEXTERO ADJUSTABLE WALL FLOOD (7800LM)

LCS table		
BUG rating: B4 - UX - G1		
Forward light	Lumens	Lumens %
Low (0-30):	3066.6	40.90%
Medium (30-60):	915.9	12.20%
High (60-80):	64.7	0.90%
Very high (80-90):	3.2	0.00%
Back light	Lumens	Lumens %
Low (0-30):	2760.7	36.80%
Medium (30-60):	611.4	8.10%
High (60-80):	76.8	1.00%
Very high (80-90):	10.3	0.10%
Trapped light	0	0.00%

LCS graph

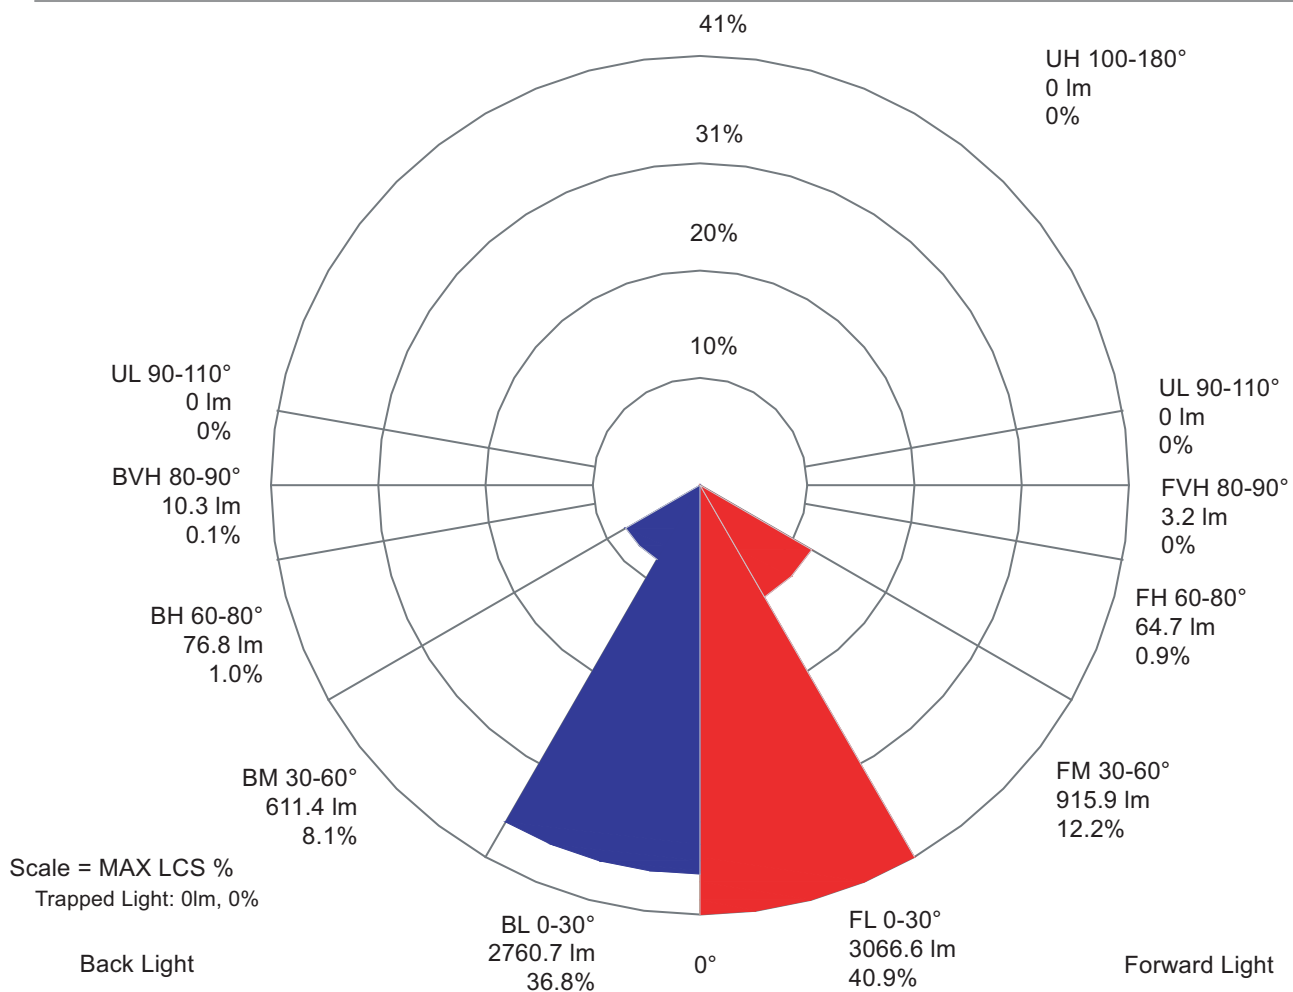

2019.09.10