



CH4SHL : 4" C-SERIES


SUPER LOW GLARE, SHALLOW LED NEW CONSTRUCTION 900LM (14W)

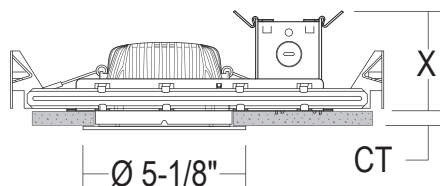

X = 3-1/8" (frame bottom to fixture top)

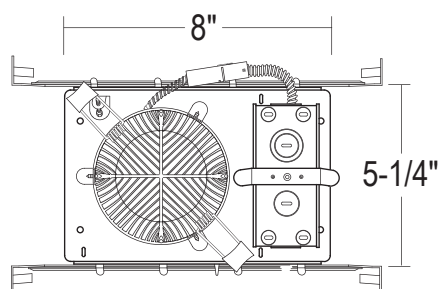

Ceiling Thickness (CT) = 1-3/4" (Max.)
Ceiling Cut-Out: 4-1/4"

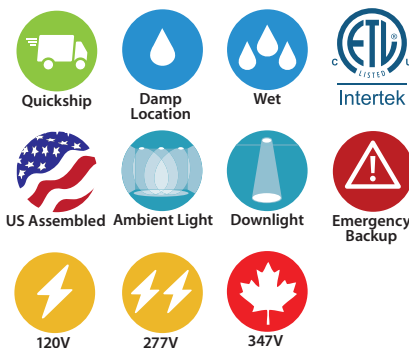

- Deeply recessed lens and 67.5° visual cutoff for reduced glare
- Shallow 3-1/8" depth for ceilings with minimal plenum air-space
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CH4SHL10UE-D10/CR4SHL15SW-T30



Click for Full Specification Details

CH4SHL											
Lumens		Insulation Contact		Driver Options		Emergency Options		J-Box		Reflector Finish	
		Insulation Contact						J-Box			
		Non-IC	Blank					Standard	Blank		
		ICA Rated/Airtight	ICA					Junction Box (Chicago Plenum)	-CHP		
Lumens											
900lm (14W)	CH4SHL10										
Driver Options ¹		Emergency Options		Reflector Finish		Options					
0-10V Dimming	UE-D10	None	Blank	Satin Haze Reflector /White Ring	/CR4SHL15SW	None	Blank				
UniDim™ 0-10V ELV and Triac Dimming	UE-DUN	Remote Location Emergency Battery	-EM	White Reflector /White Ring	/CR4SHL15WW	Lens for wet locations w/ 60° Beam Spread	-LENS60				
120V ELV and Triac Dimming	-DIN	Remote Location Emergency Inverter	-EMAC ³	All Black	/CR4SHL15BB ²	Lens for wet locations w/ 110° Beam Spread	-LENS110				
Lutron Hi-lume	UE-DHL	Generator Transfer Device	-GTD	All Satin Haze	/CR4SHL15SS ²						
Lutron EcoSystem	UE-ECO										
347V, 0-10V Dimming	-347-D10 ²										
0-10V Dimming (1%)	UE-D10P1										
Athena Wireless Node	-AWN										
Athena Wireless Node Occupancy Sensor	-AWN-OCC										

¹ All drivers are 120V/277V unless otherwise noted.

² Extended Lead Time. Consult Factory.

³ Check wiring diagram.