


CRTR4SHL : 4"

C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL 900LM (14W)

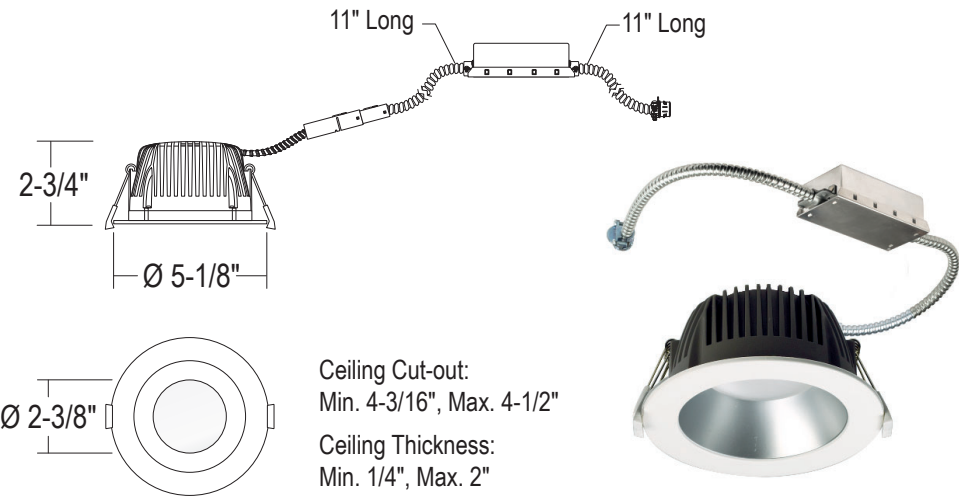

Quickship

Damp Location

Wet

Intertek

US Assembled

Ambient Light

Downlight

Emergency Backup

120V

277V

347V

- Deeply recessed lens and 67.5° visual cutoff for reduced glare
- Shallow 2-3/4" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CRTR4SHL10SWUE-D10-T30

Click for Full Specification Details

CRTR4SHL		Insulation Contact		Reflector Finish		Dimming		CCT		Options		Junction Box	
Fixture/Lumens	Insulation Contact	Insulation Contact		Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
		Non-IC	Blank										0-10V Dimming
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													0-10V Dimming
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													Lutron Hi-lume
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													120V ELV and Triac Dimming
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													347V, 0-10V Dimming
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													Integral EM Backup
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													Athena Wireless Node
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													Athena Wireless Node
ICA Rated/ Airtight	ICA	ICA Rated/ Airtight	ICA	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	
													Occupancy Sensor
Fixture/Lumens	Insulation Contact	Reflector Finish	Dimming ¹	CCT	Options	Junction Box	Options	Junction Box	Options	Junction Box	Options	Junction Box	
900lm (14W)	CRTR4SHL10	Satin Haze Reflector/ White Ring	SW	3000K -T30	None	Blank	None	Blank	None	Blank	None	Blank	
900lm (14W)	CRTR4SHL10	White Reflector/ White Ring	WW	3500K -T35	Lens for wet locations w/ 60° Beam Spread	-LENS60	Lens for wet locations w/ 110° Beam Spread	-LENS110	None	Blank	None	Blank	
900lm (14W)	CRTR4SHL10	All Black	BB ²	4000K -T40									
900lm (14W)	CRTR4SHL10	All Satin Haze	SS ²										

¹ All drivers are 120V/277V unless otherwise noted.
² Extended Lead Time. Consult Factory.