
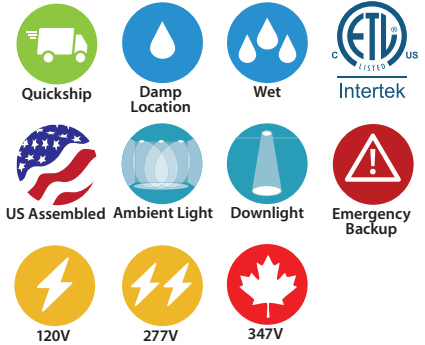


CRTR6SHL : 6" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL

1000LM - 1800LM (10W-20W)

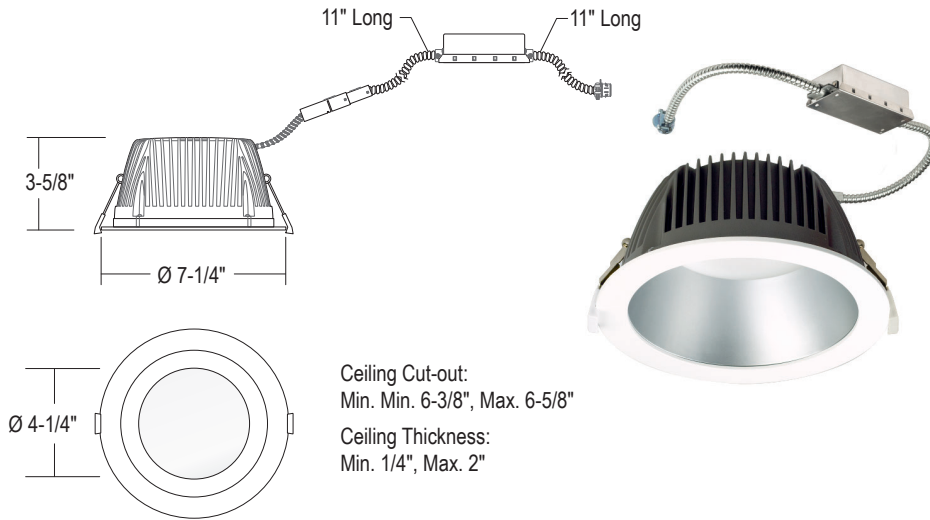

- Deeply recessed lens and 65.5° visual cutoff for reduced glare
- Shallow 3-5/8" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CRTR6SHL17SWUE-D10-TS30[Click for Full Specification Details](#)

CRTR6SHL		Insulation Contact		Reflector Finish		Dimming		CCT		Options		Junction Box	
Fixture/Lumens		Insulation Contact		Reflector Finish		Dimming ¹		CCT		Options		Junction Box	
		Non-IC	Blank			0-10V Dimming	UE-D10			None		Blank	
		ICA Rated/Airtight	ICA			UniDim™ 0-10V ELV and Triac Dimming	UE-DUN			Lens for wet locations w/ 60° Beam Spread		-LENS60	
						Lutron Hi-lume	UE-DHL²			Lens for wet locations w/ 110° Beam Spread		-LENS110	
						120V ELV and Triac Dimming	-DIN						
						347V, 0-10V Dimming	-347-D10						
						Integral EM Backup	UE-D10-EM						
						Athena Wireless Node	-AWN						
						Athena Wireless Node Occupancy Sensor	-AWN-OCC						
Fixture/Lumens		Reflector Finish		CCT		Junction Box							
1000lm (10W)	CRTR6SHL10	Satin Haze Reflector/ White Ring		3000K	-TS30	None				Blank			
1300lm (14W)	CRTR6SHL12	White Reflector/ White Ring		3500K	-TS35	Junction Box				-JB			
1800lm (20W)	CRTR6SHL17	All Black		4000K	-TS40	Junction Box (Chicago Plenum)				-JB-CHP			
		All Satin Haze		ColorSelect 3000K/3500K /4000K	-TS354								
								</					