
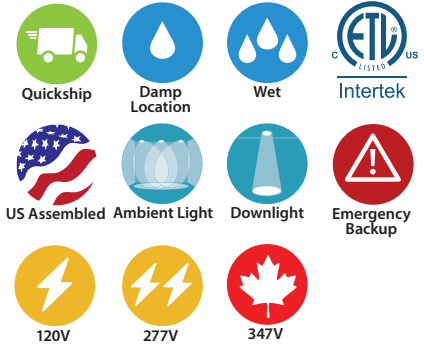


CRTR8SHL : 8" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL
 1100LM - 3000LM (10W-30W)

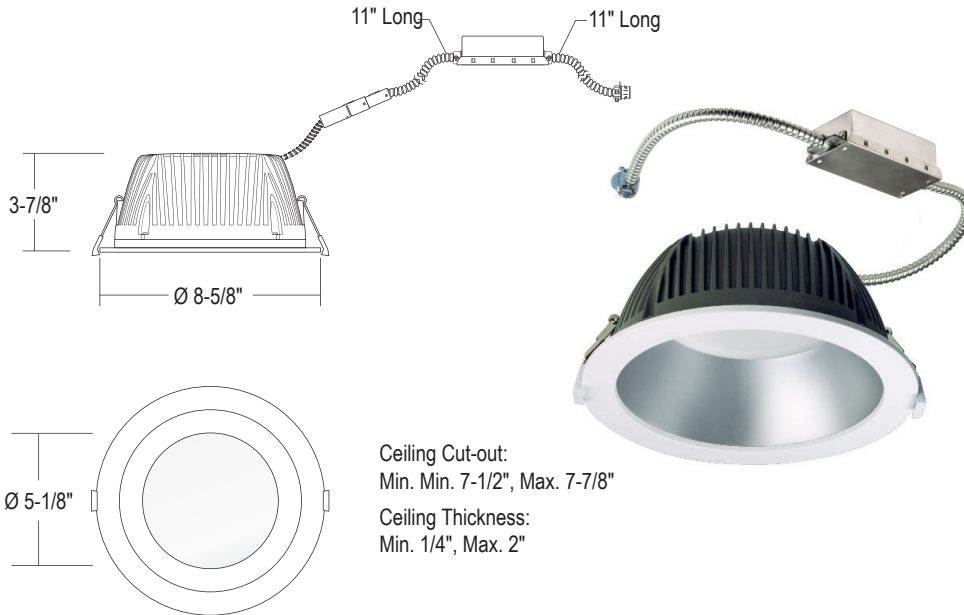

- Deeply recessed lens and 67.5° visual cutoff for reduced glare
- Shallow 3-7/8" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CRTR8SHL17SWUE-10-T30



[Click for Full Specification Details](#)

CRTR8SHL		Insulation Contact		Reflector Finish		Dimming		CCT		Options		Junction Box	
Fixture/Lumens		Insulation Contact		Reflector Finish		Dimming ¹		CCT		Options		Junction Box	
		Non-IC	Blank			0-10V Dimming	UE-D10			None	Blank		
		ICA Rated/Airtight	ICA			UniDim™ 0-10V ELV and Triac Dimming	UE-DUN			Lens for wet locations w/ 60° Beam Spread	-LENS60		
						Lutron Hi-lume	UE-DHL²			Lens for wet locations w/ 110° Beam Spread	-LENS110		
						120V ELV and Triac Dimming	-DIN						
						347V, 0-10V Dimming	-347-D10						
						Integral EM Backup	UE-D10-EM						
						Athena Wireless Node	-AWN						
						Athena Wireless Node Occupancy Sensor	-AWN-OCC						
Fixture/Lumens		Reflector Finish		CCT		Junction Box							
1100lm (10W)	CRTR8SHL10	Satin Haze Reflector/ White Ring		3000K -T30		None		Blank					
1500lm (14W)	CRTR8SHL12			3500K -T35		Junction Box		-JB					
2100lm (20W)	CRTR8SHL17	White Reflector/ White Ring		4000K -T40		Junction Box (Chicago Plenum)		-JB-CHP					
3000lm (30W)	CRTR8SHL24³	All Black											
		All Satin Haze											

¹ All drivers are 120V/277V unless otherwise noted.

² Extended Lead Time. Consult Factory.

³ ICA is NOT available for CRTR8SHL24.