


DL360 : 6" ROUND

CEILING DOWNLIGHT (IP65) 1000LM-2600LM (10W-30W)

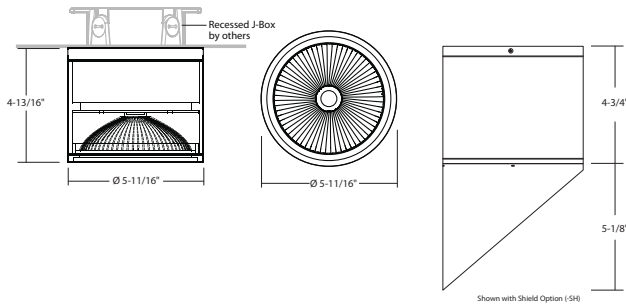

- Energy efficient, low glare LED Chip-On-Board light engine
- Beam spreads include NS, SP, FL, WFL and Pencil Beam
- Wall Wash Optics available
- Emergency back up available
- Integral Surface J-Box Option
- 5-Year Limited Warranty

ORDERING : DL360B-L15-CB10-DIN-EMAC-T27

DL360

Fixture Finish Lumen Optics Dimming Emergency Options LED Options

Finish

White	(RAL 9003) W
Silver	(RAL 7037) S
Bronze	(RAL 8019) BZ
Black	(RAL 9005) B
Light Silver	(RAL 7036) LS ⁸
Dark Grey	(RAL 7015) DG ⁸
Metallic Gold	(RAL 1001) MG ⁸
Metallic Black	(RAL 7021) MB ⁸

Lumen

1000lm (10W)	Blank
1500lm (15W)	-L15
2200lm (22W)	-L20
2600lm (30W)	-L26

Optics

Standard Beams	
Wide Flood	Blank
Pencil Beam	-CB10
15° Zero Spill	-CB15
35° Zero Spill	-CB35
Narrow Spot	-B10
Spot	-B20
Flood	-B45

Specialty Beams

Wall Wash	-WW
Asymmetric (30° x 60°)	-B3060

Dimming

Non-Dimming (120V)	Blank
ELV and Triac (120V)	-DIN
0-10V (120V/277V)	UE-D10
UniDim™ (120V/277V)	UE-DUN
0-10V 1% Dimming (120V/277V)	UE-D10P1
347V 0-10V Dimming	-347-D10⁵

Emergency Options

None	Blank
Remote Location Emergency System	-EMAC
Emergency in Canopy for Surface Mounted Fixture	-EMA^{1,6,7}

LED

4000K (90 CRI)	Blank
2700K (90 CRI)	-T27
2700K (97 CRI)	-T27-C97²
3000K (90 CRI)	-T30
3000K (97 CRI)	-T30-C97²
3500K (90 CRI)	-T35
5000K (80 CRI)	-T50
RGB+W Control (24VDC)	-RGBWV24⁴

Options

None	Blank
Hex-Cell Louver	-LVR
Photocell Sensor	-SDL
Integral Junction Box 1-Outlet	-JB
Surge Protector	-SRG
Cold Weather	-CW^{3,7}
Glare Shield	-SH
Frosted Lens	-FR
Regressed Lens	-RGRLNS

¹ -EMA and -EMA/PM for 1500lm max. Specify White (W) or Black (B).

² Special Order. Minimum order, extended lead time may apply. Consult factory.

³ Starting temperature -30°C/-22°F; see pg. 6.

⁴ Remote Power Supplies and Control Gear Required, Available with Wireless Bluetooth or DMX Control. Consult Factory for Details.

⁵ Not compatible with 1000lm selection; use with 1500lm and above.

⁶ Standard option only available for Black (B), and White (W) finish. For alternate finishes; contact factory for pricing. Extended lead time may apply.

⁷ (-EMA) is not compatible with (-CW) option.

⁸ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

347V Input with 0-10V Dimming available. Consult factory for lead times.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.