


DLQ360EM: 6" SQUARE

CEILING DOWNLIGHT W/ INTEGRAL EMERGENCY (IP65) 1000LM-2600LM (10W-30W)

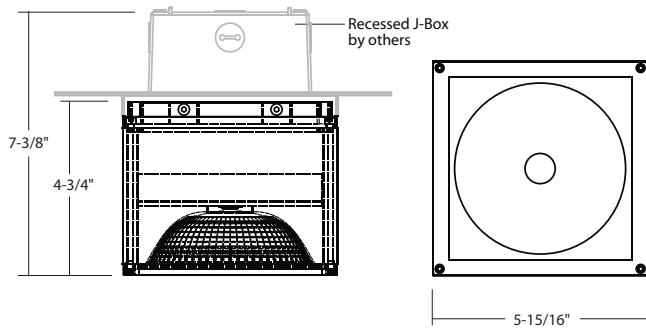

- Energy efficient, low glare LED Chip-On-Board light engine
- Beam spreads include NS, SP, FL, WFL and Pencil Beam
- Wall Wash Optics available
- Integral Emergency
- Integral Surface J-Box Option
- 5-Year Limited Warranty

ORDERING – DLQ360EMW-L15-B02-UE-D10-T30-JB

DLQ360EM

Fixture Finish Lumen Optics Dimming LED Options



Finish		Optics		Dimming		Options	
White	(RAL 9003) W	<i>Standard Beams</i>		None	Blank	None	Blank
Silver	(RAL 7037) S	Wide Flood	Blank	0-10V (120V/277V)	UE-D10	Frosted Lens	-FR
Basic Bronze	(RAL 8019) BZ	Pencil Beam	-B02	0-10V 1% Dimming (120V)	-D10P1	Hex-Cell Louver	-LVR
Black	(RAL 9005) B	Narrow Spot	-B10			Photocell Sensor	-SDL
Light Silver	(RAL 7036) LS ²	Spot	-B20			Integral Junction Box 1-Outlet	-JB
Dark Grey	(RAL 7015) DG ²	Flood	-B45			Surge Protector	-SRG
Metallic Gold	(RAL 1001) MG ²	<i>Specialty Beams</i>		LED			
Metallic Black	(RAL 7021) MB ²	Wall Wash	-WW	4000K (90 CRI)	Blank		
Lumen		Asymmetric (110° x 40°)	-B0160	2700K (90 CRI)	-T27		
1000lm (10W)	Blank			2700K (97 CRI)	-T27-C97²		
1500lm (15W)	-L15			3000K (90 CRI)	-T30		
2200lm (22W)	-L20			3000K (97 CRI)	-T30-C97²		
2600lm (30W)	-L26			3500K (90 CRI)	-T35		
				5000K (80 CRI)	-T50		
				RGB+W Control (24VDC)	-RGBWV24⁴		

² Special Order. Minimum order, extended lead time may apply. Consult factory.
(Finish options 50 piece minimum. 10-12 week lead time)

⁴ Remote Power Supplies and Control Gear Required, Available with
Wireless Bluetooth or DMX Control. Consult Factory for Details.

347V Input with 0-10V Dimming available. Consult factory for lead times.

(Click for more Information)



View Full Detailed Specification Sheet