


WD1340: 4" ROUND 1-DIRECTION

WALL MOUNT (IP65) 1000LM/1500LM (10W/15W)

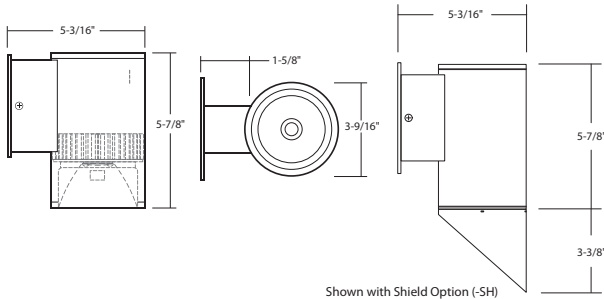

- Uniform, low glare illumination
- Singular COB light source
- New integral emergency option
- UniDim™ dimming option with 2-wire incandescent, 3-wire, ELV or 0-10V controls
- 13' mtg. ht., 22' o.c. spacing (1000 lumen package)
- 25' mtg. ht., 22' o.c. spacing (1500 lumen package)
- 5-year limited warranty
- Photocell available
- Available with Type IV/Forward Throw Optics

ORDERING : WD1340B-L15-CB35UE-D10-EMAC-T30



[Click for Full Specification Details](#)

WD1340

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options
Finish		Optics		Dimming³		LED	
White	(RAL 9003) W	<i>Standard Beams</i>		Non-Dimming (120V)	Blank	4000K	Blank
Silver	(RAL 7037) S	Wide Flood	Blank	ELV and Triac Dimming (120V)	-DIN	2700K (97 CRI)	-T27-C97²
Bronze	(RAL 8019) BZ	Narrow Spot	-B10	0-10V Dimming (120V/277V)	UE-D10	3000K	-T30
Black	(RAL 9005) B	Spot	-B20	UniDim™ (120V/277V)	UE-DUN	3000K (97 CRI)	-T30-C97²
Light Silver	(RAL 7036) LS¹	Flood	-B45	0-10V 1% Dimming (120V/277V)	UE-D10P1	3500K	-T35
Dark Grey	(RAL 7015) DG¹	<i>CleanBeam™ Option</i>		Emergency Options		5000K	-T50
Metallic Gold	(RAL 1001) MG¹	10° Pencil Beam	-CB10	None	Blank	Amber (590nm)	-TAM⁸
Metallic Black	(RAL 7021) MB¹	20° Clean Beam	-CB20	Remote	-EMAC	RGB+W Control (24VDC)	-RGBWV24⁷
Lumen		35° Clean Beam	-CB35	BackPack (Side Mount)	-EMB-SD⁶	Options	
1000lm	(10W) Blank	<i>Specialty Beams</i>		BackPack (Face Mount)	-EMB-FC⁶	None	Blank
1500lm	(15W) -L15	Wall Wash	-BWW	BackPack (Empty)	-EMB-BLANK⁵	Black Hexcell Louver	-LVR
		Forward Throw (Type IV)	-BIV			Photocell Sensor	-SDL
		Type II (30° x 60°)	-BII²			Surge Protector	-SRG
						Cold Weather	-CW^{4,6}
						Glare Shield	-SH

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.

³Standard driver minimum starting temperature is -10°C / 14°F.

⁴Cold Weather Start (-CW) Starting Temperature -30°C / -22°F.

⁵Blank EM enclosure available for non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

⁶(-EMB) is not compatible with (-CW) option.

⁷Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.

⁸(-TAM) 590nm AMBER is only available with (Blank) Wide Flood Optic.

347 Input with 0-10V available. Consult Factory for details and lead time.

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.

Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k, RGBW, and 590nm Amber.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.