


WD1360: 6" ROUND 1-DIRECTION

WALL MOUNT (IP65) 1000LM - 2600LM (10W/15W/22W/30W)

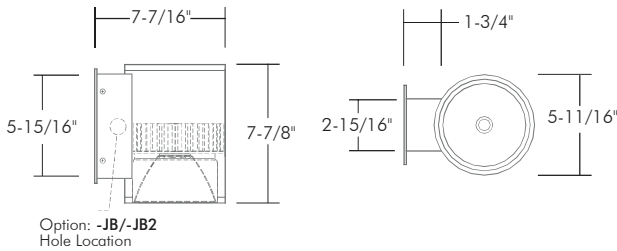

- Uniform, Low Glare Illumination
- Singular COB light source
- New Integral Emergency Option
- Unidim dimming option with 2-wire Incandescent, 3-Wire ELV or 0-10V controls
- 13' Mtg. Ht., 22' O.C. Spacing (1000 lumen package)
- 25' Mtg. Ht., 22' O.C. Spacing (1500 lumen package)
- 5-Year Limited Warranty
- Photocell Available
- Available with Type IV/Forward Throw Optics
- Available with 347Vac, 0-10V dimming

ORDERING : WD1360B-L15-B20-T27-EMAC-LVR



[Click for Full Specification Details](#)

WD1360

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options
Finish		Optics		Dimming³		LED	
White	(RAL 9003) W	<i>Standard Beams</i>		Non-Dimming (120V)	Blank	4000K (90 CRI)	Blank
Silver	(RAL 7037) S	Wide Flood	Blank	ELV and Triac Dimming (120V)	-DIN	2700K (90 CRI)	-T27
Bronze	(RAL 8019) BZ	Narrow Spot	-B10	0-10V Dimming (120V/277V)	UE-D10	2700K (97 CRI)	-T27-C97²
Black	(RAL 9005) B	Spot	-B20	UniDim™ (120V/277V)	UE-DUN	3000K (90 CRI)	-T30
Light Silver	(RAL 7036) LS¹	Flood	-B45	0-10V 1% Dimming (120V/277V)	UE-D10P1	3000K (97 CRI)	-T30-C97²
Dark Grey	(RAL 7015) DG¹	<i>CleanBeam™ Option</i>		347V 0-10V Dimming	-347-D10⁸	3500K (90 CRI)	-T35
Metallic Gold	(RAL 1001) MG¹	10° Pencil Beam	-CB10	Emergency Options		5000K (90 CRI)	-T50
Metallic Black	(RAL 7021) MB¹	15° Clean Beam	-CB15	None	Blank	590nm AMBER	-TAM¹⁰
Lumen		35° Clean Beam	-CB35	Remote	-EMAC	RGB+W Control (24VDC)	-RGBWV24⁷
1000lm (10W)	Blank	<i>Specialty Beams</i>		BackPack (Side Mount)	-EMB-SD⁶	Options	
1500lm (15W)	-L15	Wall Wash	-BWW	BackPack (Face Mount)	-EMB-FC⁶	None	Blank
2200lm (22W)	-L20	Forward Throw (Type IV)	-BIV	BackPack (Empty)	-EMB-BLANK⁵	Hex-Cell Louver	-LVR
2600lm (30W)	-L26	Type II (110°x 40°)	-BII²			Photocell Sensor 120V/277V	-SDL

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.

³Standard driver minimum starting temperature is -10°C / 14°F.

⁴Cold Weather Start (-CW) Starting Temperature -30°C / -22°F.

⁵Blank EM enclosure available for non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

⁶(-EMB) is not compatible with (-CW) option.

⁷Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.

⁸(-347-D10) not available with 1000lm (10W) Lumen option.

⁹Must Specify Left or Right, see Page 7 for more details.

¹⁰(-TAM) 590nm AMBER must be ordered with Blank Lumen, (Blank) Wide Flood Optic and (-LVR) Hex-cell louver.

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.

Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k, RGBW, and 590nm Amber.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.