


WD1Q360: 6" SQUARE 1-DIRECTION

WALL MOUNT (IP65) 1000LM-2600LM (15W/22W/30W)

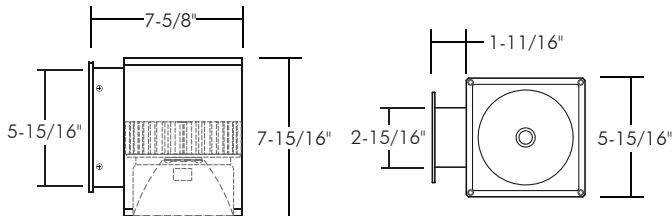

- Now with Integral Emergency Option!
- Photocell sensor available
- Uniform, low glare illumination
- Durable, corrosion resistant finish
- Singular COB Light Source
- 5-Year Limited Warranty
- 12 Ft Mtg Ht. 20 Ft O.C. Spacing (1000 Lumen Package)
- 23 Ft Mtg Ht. 23 Ft O.C. Spacing (1000 Lumen Package)
- Available with Type IV/Forward Throw Optics
- UniDim™ option dimming with 2-Wire Incandescent, 3-Wire, ELV or 0-10V Controls
- Integral JBOX Option

ORDERING : WD1Q360B-L15-B02-UE-DUN-T17-EMAC

WD1Q360

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options
Finish		Optics			Dimming		
White	(RAL 9003) W	Blank	<i>Standard Beams</i>		Non-Dimming (120V)	Blank	
Silver	(RAL 7037) S		Wide Flood	Blank	ELV and Triac Dimming (120V)		
Basic Bronze	(RAL 8019) BZ		Narrow Spot	-B10	0-10V Dimming (120V/277V)		
Black	(RAL 9005) B		Spot	-B20			
Light Silver	(RAL 7015) LS*		Flood	-B45			
Dark Grey	(RAL 7036) DG*		<i>CleanBeam™ Option</i>		UniDim™ (120V/277V)		
Metallic Gold	(RAL 1001) MG*	10° Pencil Beam	-B02	347V 0-10V Dimming	UE-DUN⁵	347-D10	
Metallic Black	(RAL 7021) MB*	15°	-CB15	Emergency Options			
Lumen¹		35°	-CB35	Remote			-EMAC
2 x 1000lm (30W)	Blank	<i>Specialty Beams</i>		BackPack (Side Mount)	-EMB-SD		
1500lm (22W)	-L15	Wall Wash	-WW	BackPack (Face Mount)	-EMB-FC		
2200lm (22W)	-L20	Forward Throw (Type IV)	-IV	BackPack (Empty)	-EMB-BLANK⁸		
2600lm (30W)	-L26	Type II/VS (110°x 40°)	-BII				

¹ (Blank) 1000lm (15W) color temperature is 80CRI minimum, and is not available in 90 plus CRI. (-L15) 1500lm (22W), (-L20) 2200lm (22W), and (-L26) 2600lm (30W) are 90CRI minimum with optional 97CRI.

² (-TAM) 590nm AMBER is only available with (Blank) Wide Flood Optic.

³ C97 CRIS are Special Order. Minimum order, extended lead time may apply. Consult factory.

⁴ Remote Power Supplies and Control Gear Required, Available with Wireless

Bluetooth or DMX Control. Consult Factory for Details.

⁵ Standard driver starting temp -10°C/14°F

⁶ Select left or right entry.

⁷ Starting Temperature -30°C/-22°F

⁸ Blank EM enclosure available for Non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

*Special Order. Minimum order, extended lead time may apply. Consult factory.

(Finish options 50 piece minimum. 10-12 week lead time)

347V Input with 0-10V Dimming available. Consult factory for lead times.

(Click for more Information)



[View Full Detailed Specification Sheet](#)