


WD2340 : 4" ROUND 2-DIRECTION WALL MOUNT (IP65) 2 X 1000LM (30W)

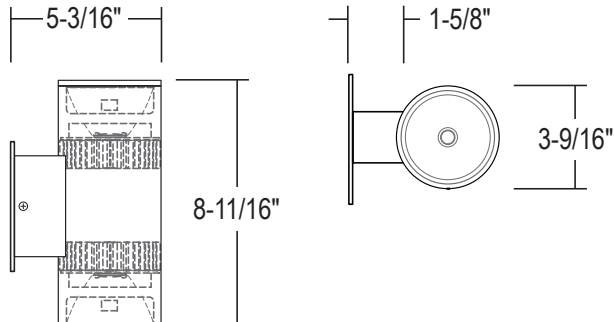

- Now with Integral Emergency Option!
- Uniform, low glare illumination
- Durable, corrosion resistant finish
- Emergency back up available
- Dual COB Light Source
- 5-Year Limited Warranty
- UniDim™ option dimming with 2-Wire Incandescent, 3-Wire, ELV or 0-10V Controls
- Photocell available
- Available with Type IV/Forward Throw Optics

ORDERING : WD2340B-B10-B02-UE-DUN-T17

WD2340

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options
Finish		Optics		Dimming		LED	
White (RAL 9003) W		ⓘ <i>Beam Up</i>		ⓘ <i>Beam Down</i>		Non-Dimming (120V) Blank	
Silver (RAL 7037) S		<i>Standard Beams</i>		<i>Standard Beams</i>		2700K (90 CRI) -T27	
Basic Bronze (RAL 8019) BZ		Wide Flood Blank	Wide Flood Blank	ELV and Triac Dimming (120V) -DIN⁵		2700K (97 CRI) -T27-C97³	
Black (RAL 9005) B		Narrow Spot -BU10	Narrow Spot -BD10	0-10V Dimming (120V/277V) UE-D10⁵		3000K (90 CRI) -T30	
Light Silver (RAL 7036) LS³		Spot -BU20	Spot -BD20	UniDim™ (120V/277V) UE-DUN⁵		3000K (97 CRI) -T30-C97³	
Dark Grey (RAL 7015) DG³		Flood -BU45	Flood -BD45	0-10V 1% Dimming (120V) -D10P1		3500K (90 CRI) -T35	
Metallic Gold (RAL 1001) MG³		<i>CleanBeam™ Option</i>		347V 0-10V Dimming -347-D10		5000K (80 CRI) -T50	
Metallic Black (RAL 7021) MB³		10° Pencil Beam -CBU02	10° Pencil Beam -CBD02	Emergency Options		RGB+W Control (24VDC) -RGBWV24⁴	
Lumen¹		15° -CBU15	15° -CBD15	Remote -EMAC		Options	
2 x 1000lm (30W) Blank		35° -CBU35	35° -CBD35	BackPack (Side Mount) -EMB-SD⁹		None Blank	
		<i>Specialty Beams</i>		BackPack (Face Mount) -EMB-FC⁹		Black Hexcell Louver -LVR	
		Wall Wash -BUWW	Wall Wash -BDWW	BackPack (Empty) -EMB-BLANK^{9,10}		Integral Junction Box 1-Entry -JBL, JBR⁸	
		Forward Throw (Type IV) -BUIV	Forward Throw (Type IV) -BDIV			Photocell Sensor -SDL	
		Type IIVS (110°x 40°) -BUII	Type IIVS (110°x 40°) -BDII			Surge Protector -SRG	
						Cold Weather -CW^{6,9}	

³ Special Order. Minimum order, extended lead time may apply. Consult factory.
(Finish options 50 piece minimum. 10-12 week lead time).

⁴ Remote Power Supplies and Control Gear Required, Available with Wireless Bluetooth or DMX Control. Consult Factory for Details.

⁵ Standard Driver Starting Temp -10°C/14°F.

⁶ Starting Temp -30°C/-22°F.

⁸ Specify (JBL) left or (JBR) right entry

⁹ (-EMB) is not compatible with (-CW) option.

¹⁰ Blank EM enclosure available for Non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

347V Input with 0-10V Dimming available. Consult factory for lead times.

(Click for more Information)



[View Full Detailed Specification Sheet](#)