


LR2616 - ADJUSTABLE REFLECTOR

6" LOW VOLTAGE TRIMS

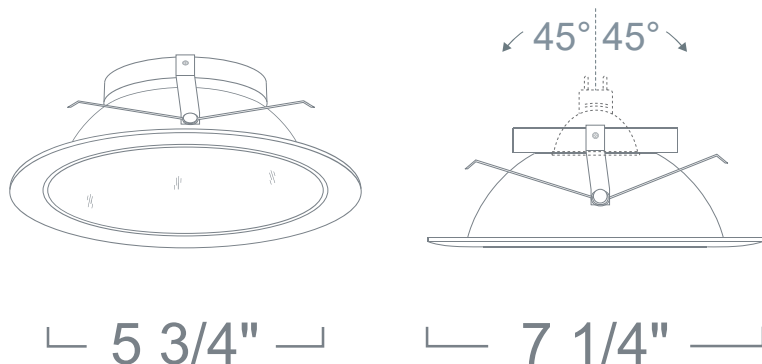

SPECIFICATION

12V 75W Max MR16 GU5.3

Application: Downlights are great for basic area lighting of a room or space accommodating the type of lighting to enhance its mood and decor. Baffle downlights are used to minimize unwanted glare from the lamp source.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Reflector Finish: Spun Aluminum Reflector Available in White, Black, Clear, Gold, All Copper*, Satin Haze and Champagne.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Gold, Natural and Copper.

COMPATIBILITY



LH7LV

STANDARD HOUSING
120V/277V



LH7LVIC

IC HOUSING



LH7RLV

REMODEL HOUSING
120V/277V



LK50

MR16 RETROFIT
TRANSFORMER

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR2616W

LR2616	REFLECTOR FINISH	RING FINISH	ACCESSORIES
LR2616	W :White	Blank :White	/L38 :Clear Lens
	C :Clear	B :Black	/L40 :Yellow Lens
	G :Gold	C :Chrome	/L41 :Blue Lens
	S :Satin Haze	G :Gold	/L42 :Amber Lens
	B :Black	N :Natural	/L43 :Green Lens
		CO :Copper	/L44 :Daylight Blue Lens
			/L48 :Lens with Internal Louver Filter
			/L49 :Frosted Soft Focus
			/L50UV :UltraViolet Filter
			/L53 :Micro - Prismatic Spread Lens
			/L55 :Linear Spread Lens
			/LL16B :Black
			/LL16C :Clear

ID#: 143