


## LR479 - ADJUSTABLE BAFFLE 6" LINE VOLTAGE TRIMS

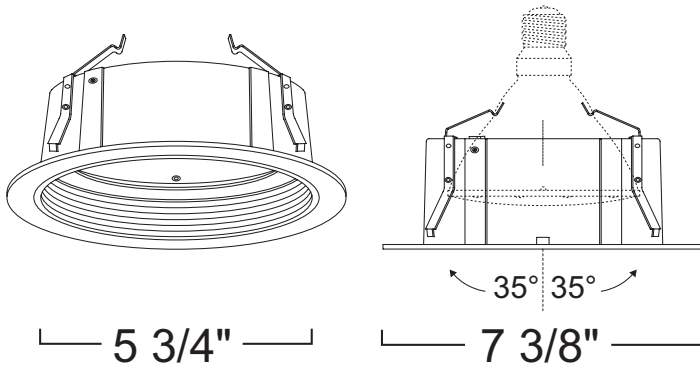

### SPECIFICATION

120V 150W Max PAR38 MED E26

**Application:** The standard in residential adjustable illumination, the gimbal design provides flexibility and versatility from a single rotary axis. It doubles as both a downlight and as an accent light. They are an economic way to provide general and accent lighting with both vertical and horizontal aiming capabilities. Their large degrees of rotation result in both streamlined style and practical ergonomics.

**PAR38** gimbals offer higher wattages accenting object far away objects.

**Regressed** gimbal design conveniently helps shield lamp glare from surrounding environments.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Baffle Finish:** Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural\* and All Copper\*.

**Ring Finish:** Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Gold, Natural, Copper and Mocha.

### COMPATIBILITY



LH7

STANDARD E26  
HOUSING



LH7IC

100W IC E26 HOUSING



LH7R

REMODEL E26  
HOUSING

Note: Wattage limitations on compatible items must be met.

2016.7.27

### FEATURE:



ORDERING EXAMPLE : LR479W

| LR479 | BAFFLE FINISH          | RING FINISH         |
|-------|------------------------|---------------------|
| LR479 | <b>W</b> :White        | <b>Blank</b> :White |
|       | <b>B</b> :Black        | <b>B</b> :Black     |
|       | <b>N</b> :All Natural* | <b>C</b> :Chrome    |
|       | <b>CO</b> :All Copper* | <b>G</b> :Gold      |
|       |                        | <b>N</b> :Natural   |
|       |                        | <b>CO</b> :Copper   |
|       |                        | <b>MO</b> :Mocha    |

\* Comes standard with a matching ring finish. Use "W" for White Ring.

ID# : 27