


## LR520 - ADJUSTABLE SPOT 6" LINE VOLTAGE TRIMS

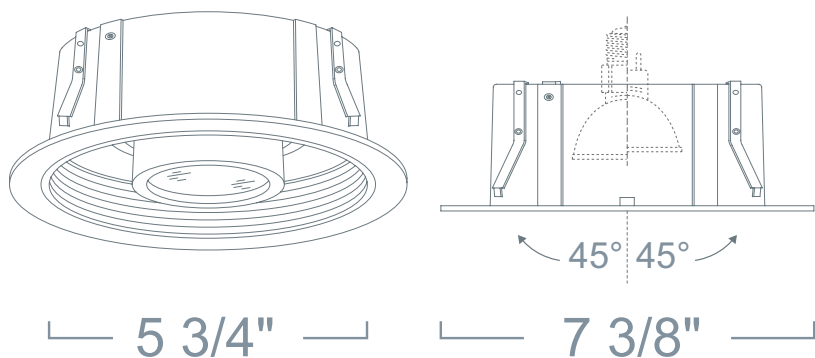

### SPECIFICATION

120V 50W Max JDR-MR16 MED E26

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Adjustability** Lamp can be tilted 45° degrees vertically.

**Baffle Finish:** Available in Black, All Natural\* and All Mocha\*.

**Ring Finish:** Available in White, Black, Natural, Copper and Mocha.

**Label:** UL Listed, cETL Listed

### COMPATIBILITY

|                                                                                                                                           |                                                                                                                                          |                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <br><b>LH27</b><br><b>STANDARD SHALLOW E26 HOUSING</b> | <br><b>LH27R</b><br><b>REMODEL SHALLOW E2 HOUSING</b> | <br><b>LH7</b><br><b>STANDARD E26 HOUSING</b> |
| <br><b>LH7IC</b><br><b>100W IC E26 HOUSING</b>         | <br><b>LH7R</b><br><b>REMODEL E26 HOUSING</b>         |                                                                                                                                  |

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LR520B

| LR520 | BAFFLE FINISH          | RING FINISH         |
|-------|------------------------|---------------------|
| LR520 | <b>B</b> :Black        | <b>Blank</b> :White |
|       | <b>N</b> :All Natural* | <b>B</b> :Black     |
|       | <b>MO</b> :All Mocha*  | <b>N</b> :Natural   |
|       |                        | <b>CO</b> :Copper   |
|       |                        | <b>MO</b> :Mocha    |

\* Comes standard with a matching ring finish. Use "W" for White Ring.

ID# : 29