
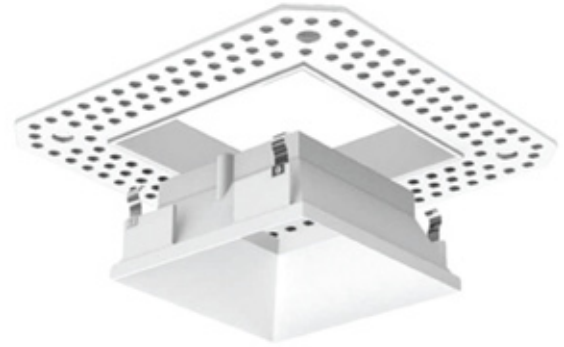


LRXQ321 - SQUARE TRIMLESS OPEN REFLECTOR

3" 12W/19W LED SQUARE DOWNLIGHTS

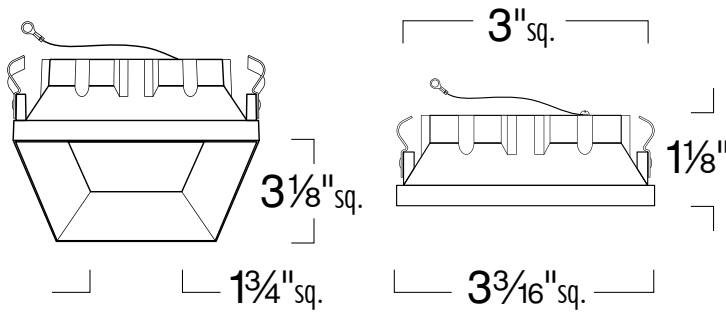

SPECIFICATION

Application: Mini-Arc² Phantom 3" Square LED Trims feature LITON's exclusive Phantom 'Trimless' design that allows the trims to sit flush to the ceiling with no visible trim ring. They are designed for low to medium ceiling heights in retail, hospitality, commercial and high-end residential applications that benefit from zero sight line linearity and symmetry in modern interior lighting designs. Fully die-cast construction insures long lasting beauty and durability.

Trim Construction: Trim is die-cast and includes a perforated mesh flange for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the trim producing a clean, flat 'Trimless' look.

"Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing. Cable tether secures trim to housing for easy maintenance. For trimless applications mud flange provided with LRX style reflector can be attached to bottom of ceilings up to 2" thick."

Power Connection: LED lamp array is replaceable via on board quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

"Optics: Interchangeable optics installed on LHQLD housing allow polycarbonate lens to be changed in the field to modify beam spread. No tools required.

Color Temperature: Comes standard with 3000K Warm White LEDs mounted on housing. Binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results. Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink installed on LHQLD housing for maximum heat rejection to provide long LED life."

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Finish: Only available in White.

COMPATIBILITY



LHQLD3

**3" 12W/19W MINI-ARC
SQUARE LED HOUSING
(DIMMABLE)**



LHQ3LV

**3" MINI-ARC SQUARE
12V MR16 HOUSING**

Note: Wattage limitations on compatible items must be met.

Benefit:

- Fully Die-Cast Square 'Trimless' Reflector
- Plaster flange kit included
- Safety tether attached to trim

2016.8.3

FEATURE:



ORDERING EXAMPLE : LRXQ321W

LRXQ321	FINISH	RATING
LRXQ321	W :White B :Black	Blank :Damp Location

ID#: 2657