


LH99ICA-GU10 - IC HOUSING

4" LINE VOLTAGE GU10-MR16 HOUSINGS

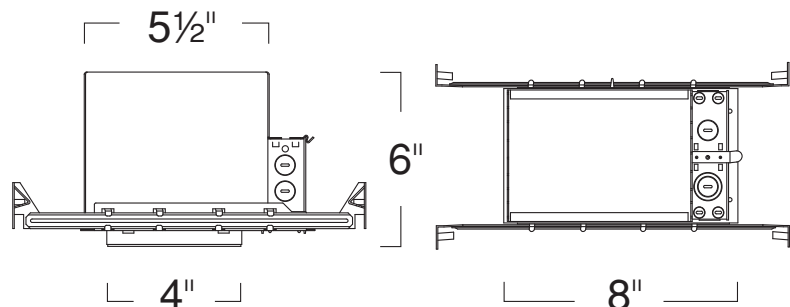

SPECIFICATION

120V 35W Max MR16 GU10

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Lamping: Available in 12W LED* and 50W Incandescent.

Label: cETL Listed

COMPATIBILITY

 LR1493 METAL BAFFLE	 LR1421 REFLECTOR	 LR1495 WALL WASH BAFFLE
 LR1419 PINHOLE W/ PHENOLIC BAFFLE	 LR1443 PINHOLE W/ BAFFLE	 LR1493 METAL BAFFLE
 LR1409 ADJUSTABLE GIMBAL	 LR1409 ADJUSTABLE GIMBAL	 LR1419 PINHOLE W/ PHENOLIC BAFFLE
 LR1446 DECO GLASS-SHIELD (DOME)	 LR1446 DECO GLASS-SHIELD (DOME)	 LR1495 WALL WASH BAFFLE

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LH99ICA-GU10

LH99ICA-GU10

LAMPING

LH99ICA-GU10

Blank :50W Incandescent
-LBL12 :12W LED*

* LED version does not have secondary shroud.

ID#: 1568