
TYPE CATALOG#

PROJECT

SL630: 9"LOUVER FACE LED STEP LIGHT

AMBER (TURTLE SAFE) LED PATHWAY/STEP LIGHTING (11W)



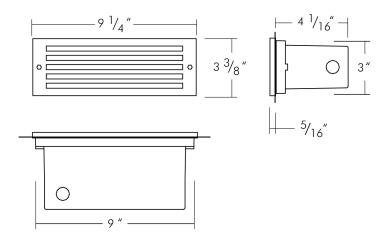























- (IP65) Suitable for wet locations
- 590nm Amber (turtle Safe)
- 120V/277V Option
- 5-Year Warranty



ORDERING: SL630BUE-TAM

SL630				
Fixture	Finish	Options	Color Temperature	

Finish		Options		Color Temperature	
Black	В	120V	Blank	590nm Amber	-TAM
White	W	120V/277V	UE		
Silver	N^1	120V/277V	UE-DUN		
Bronze	BZ¹	0-10V Dimming			

¹Extended Lead Time may apply.



SL630: 9" LOUVER FACE LED STEP LIGHT AMBER (TURTLE SAFE) LED PATHWAY/STEP LIGHTING (11W)

SPECIFICATION

Application	
	Recessed Wall Luminaire designed for commercial, architectural, and residential installation. Designed to conform to the architectural requirements for low mounting heights for the illumination of steps, stairways, walkways, aisles, ramps and other indoor and outdoor applications. Can be mounted vertically.
Housing	
	Constructed of high grade die cast aluminum with an integral wiring compartment and silicone gasket. Four (4) threaded holes (1/2-14 NPSM) and mounting tabs provided.
Faceplate	
	Rectangular open one-piece die cast aluminum faceplate and semi-translucent UV stabilized polycarbonate opal lens. Faceplate is installed by two (2) captive, tamper resistant, stainless steel screws.
Electrical	
	120V/277V Modular LED Engine (Field Replaceable) Consult Factory for dimming and sensor options.
Finish	
(W) (S) (BZ) (B)	Available in Black, White, Silver and Bronze.
Listing	
	ETL /cETL Listed, suitable for wet location and for all types of constructions including mounting within 1.2 m (4 feet) of the ground, use in poured concrete, Type IC, Type Non-IC. ADA compliant. Assembled in USA. (IP65).
Warranty	
	Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship.
Color Temperature	
Amber	590nm Amber.

