
File Located online www.liton.com/spec

## New Construction (IC) w/ Micro Pinhole w/ Black Reflector

## LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING



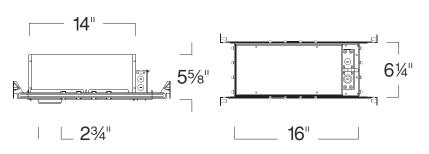

## **SPECIFICATION**

Ceiling cut-out: 2 3/4"

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Lens Inclusion: Clear glass protective safety lens included in packaging.

**Housing:** Pre-wired .05'' baked enamel 1-piece drawn steel housing adjusts up to 3/4'' ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Accessories: Takes (1) 1 3/8" Media.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.


Label: cETL Listed

**FEATURE:** 

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

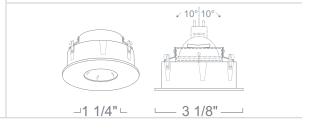

NEW CONSTRUCTION (IC) LH1299IC 12V Out 37W Max MR11/M 12V Out 37W Max MR11/MR16

OPTION LH1299ICA :37W Airtight IC

MICRO PINHOLE W/ BLACK REFLECTOR LR1219 12V 35W Max MR11

|          | TRIM FINISH                            |
|----------|--|
| LR1219W  | :White Pinhole/Black Reflector         |
| LR1219B  | :Black Pinhole/Black Reflector         |
| LR1219N  | :Natural Metal Pinhole/Black Reflector |
| LR1219CO | :Copper Pinhole/Black Reflector        |
| LR1219MO | :Mocha Pinhole/Black Reflector         |

