


Sloped Ceiling Housing w/ Fire Barrier LH47 SERIES - 6" SLOPED LINE VOLTAGE RECESSED LIGHTING

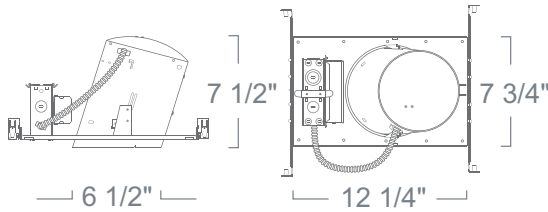

SPECIFICATION

Ceiling cut-out: 7 1/8"

Application: General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Mounting: Housing suitable for new construction installations only, supplied with (2)24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with (nail-less installation) 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings. Housing for use in 2/12 to 6/12 pitch sloped ceilings.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed

FEATURE:



This galvanized welded steel enclosure is rated (able) for one-hour resistance to active fire. **LFB2012** enclosure is designed for use with both existing and new installation of Recessed Luminaires. Fulfills the required 1-hour-fire-resistance-rating, to operate as an active fire wall, with less effort.

FEATURES

- 24GA Galvanized welded steel constructed body
- 4 flanges with 3/16" nail/screw openings
- 16"/24" (apart) joist/stud applicable
- (6)1/2" knockouts provided for wire access
- UL/NFPA/ASTM evaluated; ETL certified.

INSTALLATION

The **LFB2012** requires a minimum of 9 1/2" Steel Stud or Wood Joist, and must be spaced either 16" or 24" apart. The Luminaire affixes to the interior of the Fire Barrier, **LFB2012** using self-tapping screws.

OPERATION

Liton's **LFB2012** acts as a physical barrier to stop the progress of an active fire. This one-hour minimum rating enclosure meets that of a typical 3/8" drywall barrier.


This unit eliminates the requirement to specify more costly fire rated luminaires and labor, such as, hand constructed drywall enclosures. Which normally are not consistent of uniform in their construction, as well as their ability to maintain the fire stop.

STANDARD APPROVALS

- ASTM-E119-00a
- UL263
- UBC 7-1
- NFPA 251
- ASI A2.1

Label: cETL Listed

Assembled in USA

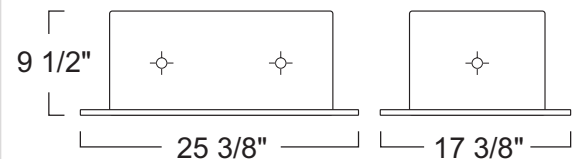

SLOPED CEILING HOUSING LH471CA

120V 90W Max PAR30/PAR16/JDR-MR16 MED E26

RATING

LH471CA-100 :IC Airtight (100W Max)

FIRE BARRIER LFB2012

INSIDE DEMENSIONS

LFB2012: 19 3/8" X 12" X 9 1/2"

Ordering example: LH471CA-100/LFB2012