

CATALOG # : WLP31 & WLP32

WARNING:

1. Cannot use an electric generator to test the LED lamp.
2. This luminaire must be installed in accordance with your local electrical codes and requirements.

INSTALLATION NOTICE:

1. This luminaire must be installed by a qualified electrician to avoid electric shock and fire accident.
2. Wear gloves during installation, in order to avoid injury.
3. Turn off the power immediately if there is smoke and fire during the installation; inform professionals to overhaul.
4. This luminaire is suitable for indoor and outdoor use.

SURFACE INSTALLATION:

1. Align mounting bracket with the J-Box. Secure in place with 4 provided screws. (Figure 5)

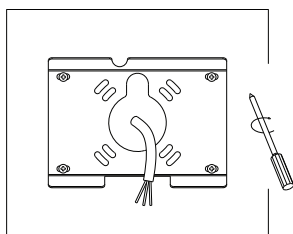


Figure 5

2. Affix the fixture to the bracket and tighten screws at the bottom to secure. Wire the fixture from the side and secure the ends using UL listed nuts and connectors. (Figure 6)

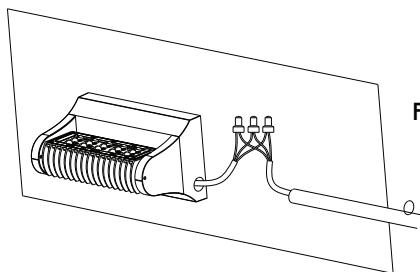


Figure 6

3. Tighten the pipe to the luminaire; adjust the emitting angle and tighten the locking screw. (Figure 7)

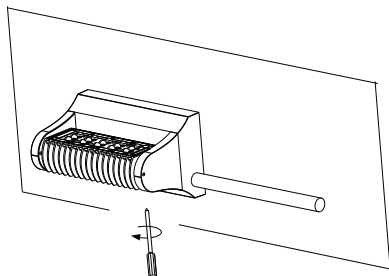


Figure 7

WARNING:

MIN 75° C SUPPLY CONDUCTOR.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

J-BOX INSTALLATION:

1. Align mounting bracket with J-Box; Secure it in place with the 4 provided screws. (Figure 1)

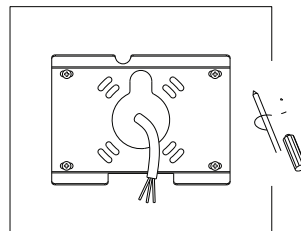


Figure 1

2. Connect the wires accordingly & secure the ends using UL listed wire nuts or connectors. (Figure 2)

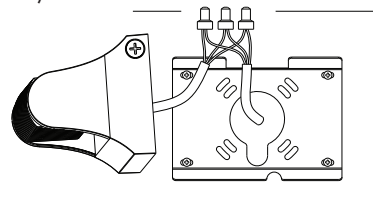


Figure 2

3. Affix the luminaire onto the bracket and tighten the screws at the bottom. (Figure 3)

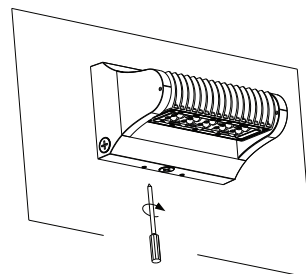


Figure 3

4. Adjust the emitter to the desired angle and tighten the locking screw. (Figure 4)

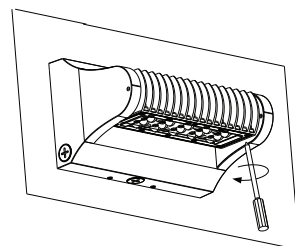


Figure 4

STANDARD WIRE:

Live Wire: Black/Brown

Null Wire: White/Blue

Ground Wire: Green/Yellow-Green